

General Specifications: (产品规格)

Function: Momentary Type, SPST with LED

Contact Rating: 0.2A 30V DC

Contact Resistance: 50mΩ Max. 1.5V DC/100mA,
by method of voltage drop

Insulation Resistance: 100MΩ Min 500V DC

Dielectric Strength: Breakdown is not allowable;
500V AC for 1 minute


Actuation Force: 250±100gf

Total Travel: 2.0mm±0.3mm


Operating life: 50,000 cycles

Operating Temperature: -20°C to 70°C


LED CIRCUIT DIAGRAM

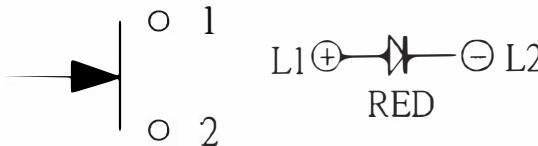

PANEL CUT OUT

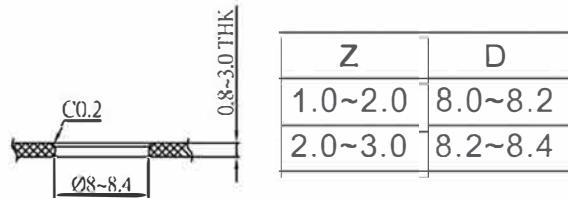

HOW TO ORDER

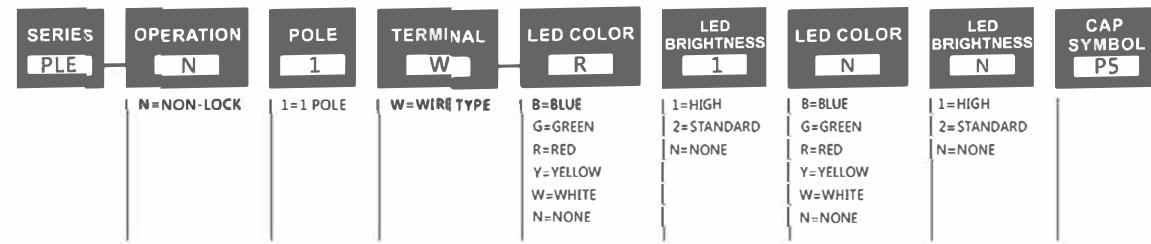

CAP Symbol: Please refer to cap selection for all available symbols on cap surface, and any customization is welcomed

PLE-N1W-B1NN

