


DIMENSIONS:

A	3.313" ±0.063
B	3.875" ±0.063
C	4.250" ±0.063
D	2.500" ±0.063
E	3.000" ±0.063
F	1.500" ±0.063
G	1/4-20 x 0.500" DEEP INSERTS
H	0.500" ±0.015

10H ±15%
150mA DC
800VDC MAX. Op.

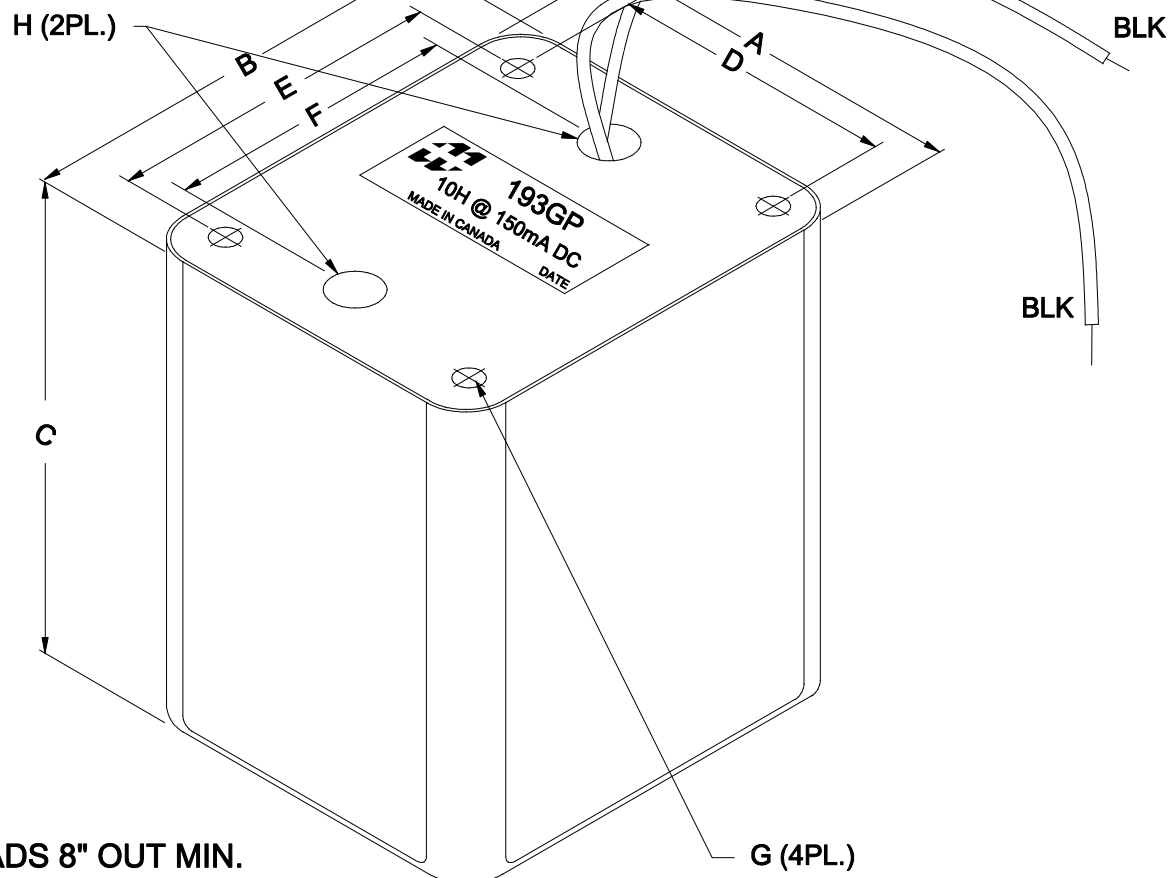

NOTE:
ALL LEADS 8" OUT MIN.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 30V, 60Hz, 150mA DC, BLK - BLK	10H ±15%
DCR	@ 20°C, BLK - BLK =	102.5Ω ±15%
HIPOT	PRIMARY - CORE	2000V, 60Hz, 1 SEC



ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

INDUCTOR

NO	DATE	REVISION	DWG. BY
0	12/16/20	RELEASED. C.I.	C. ILIE
			DATE
			12/16/20
			DIM IN(X)MM()

193GP