


DIMENSIONS:

A	3.313" ±0.063
B	3.875" ±0.063
C	4.250" ±0.063
D	2.500" ±0.063
E	3.000" ±0.063
F	1.500" ±0.063
G	1/4-20 x 0.500" DEEP INSERTS

10H ±15%
200mA DC
800VDC MAX. Op.

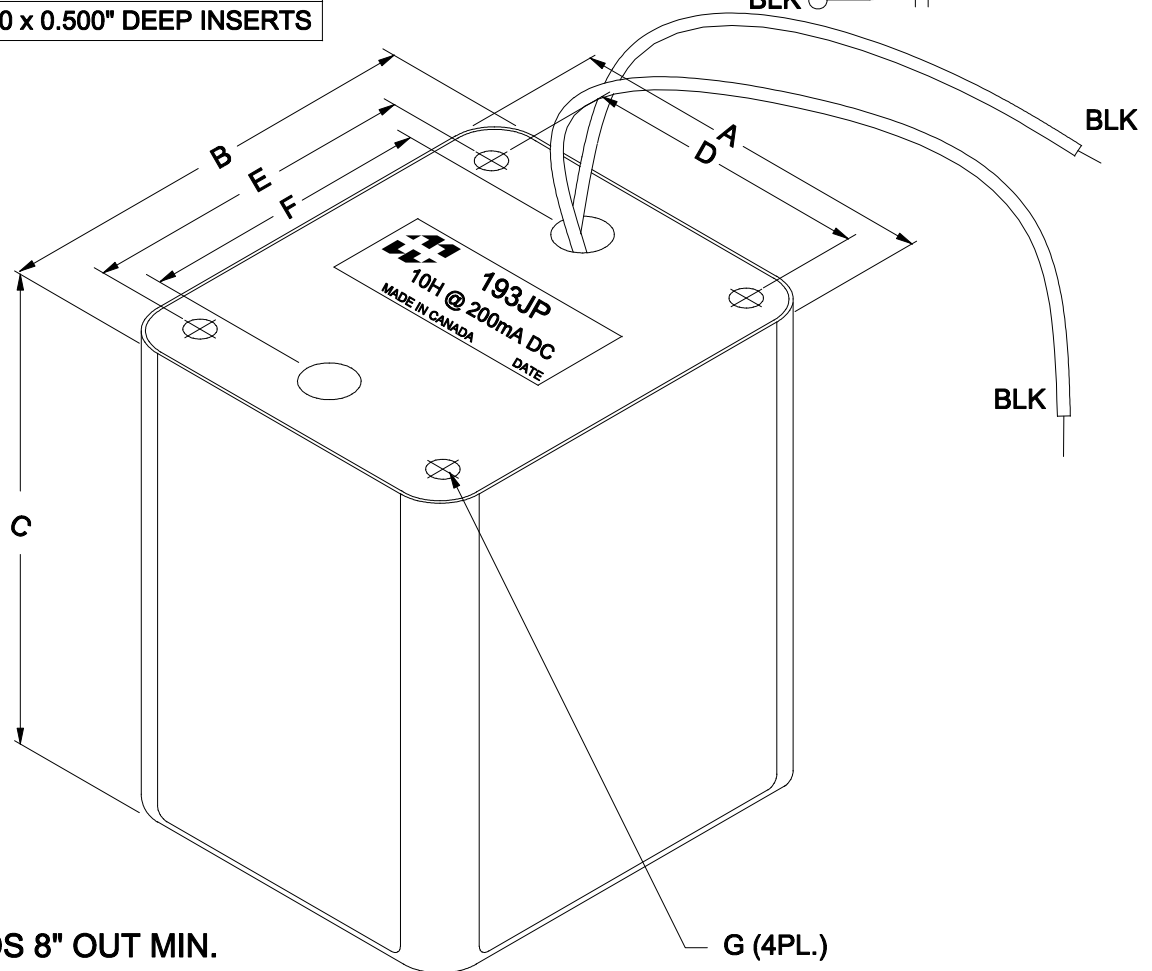

NOTE:
ALL LEADS 8" OUT MIN.

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA
INDUCTANCE	@ 50V, 60Hz, 200mA DC, BLK - BLK	10H ±15%
DCR	@ 20°C, BLK - BLK =	79.0 Ω ±15%
HIPOT	PRIMARY - CORE	2000V, 60Hz, 1 SEC



**HAMMOND
MANUFACTURING**
ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

INDUCTOR

NO	DATE	REVISION	DWG. BY
0	06/28/16	RELEASED.	C.I.
			DATE
			06/28/16
			DIM IN(X)MM()

193JP