


DIMENSIONS:	
A	4.500" ± 0.063
B	4.750" ± 0.125
C	3.750" ± 0.063
D	3.750" ± 0.063
E	3.000" ± 0.063
F	3.562" ± 0.063
G	0.203" X 0.375" 0.015

LUG

20mH $\pm 15\%$
10A DC
600VDC MAX. Op.

LUG

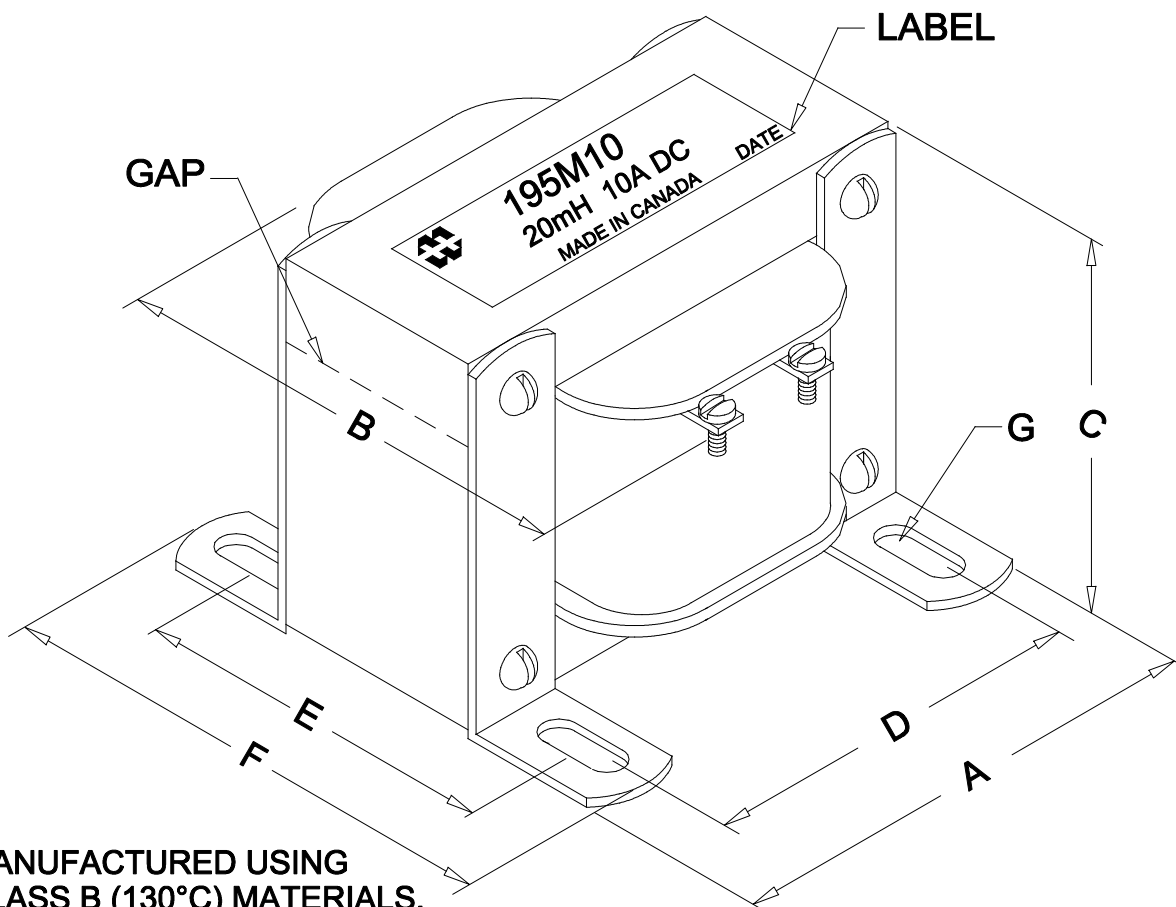

MANUFACTURED USING
CLASS B (130°C) MATERIALS.
RoHS COMPLIANT
OPERATING TEMP.:
-40°C TO 85°C
STORAGE TEMP.:
-40°C TO 105°C

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
INDUCTANCE	@ 5V, 60Hz, 10A DC, LUG - LUG	20mH	$\pm 15\%$
DCR	@ 20°C, LUG - LUG =	0.135 Ω	$\pm 15\%$
HIPOT	PRIMARY - CORE	2500V, 60Hz, 1 SEC	



ELECTRONIC DIVISION
52 RANKIN PLACE,
WATERLOO, ONTARIO, N2J 3Z5
PH # (519) 886-6181
FAX # (519) 886-9540

TITLE

CHOKE

NO	DATE	REVISION	DWG. BY
0	10/03/16	RELEASED. C.I.	C. ILIE
			DATE
			10/03/16
			DIM IN(X)MM()

195M10