
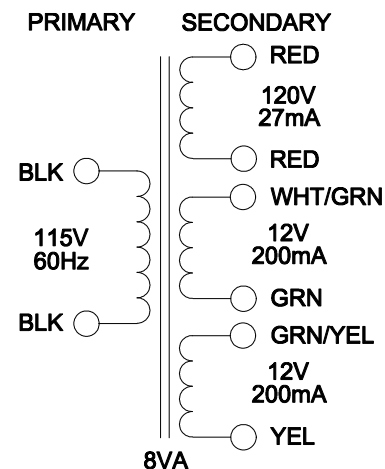


DIMENSIONS:

A	2.813" ±0.063
B	1.460" ±0.125
C	1.683" ±0.063
D	2.375" ±0.063
E	0.701" ±0.063
F	1.951" ±0.063
G	0.187" ±0.015

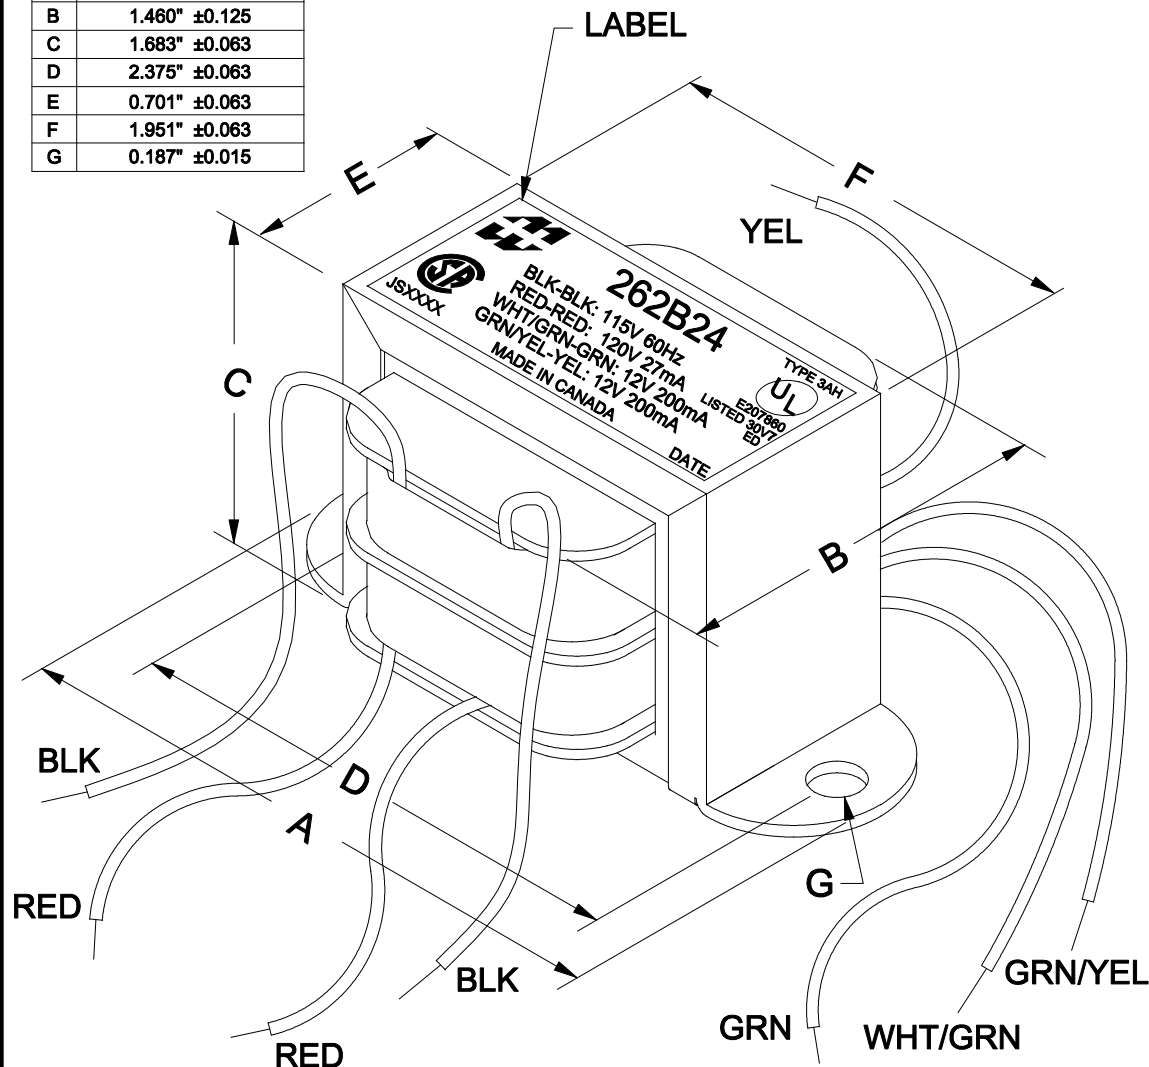

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - BLK	53mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK		
	RED - RED =	134.4V	±2%
	WHT/GRN - GRN =	13.82V	±2%
	GRN/YEL - YEL =	13.82V	±2%
DCR	@ 20°C, BLK - BLK =	71.86 Ω	±20%
	@ 20°C, RED - RED =	239.6 Ω	±20%
	@ 20°C, WHT/GRN - GRN =	4.672 Ω	±20%
	@ 20°C, GRN/YEL - YEL =	4.672 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 05/24/23	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER	DWG. NO.
			DATE: 05/24/23	APP'D. BY:	TRANSFORMER	262B24
				DIMENSIONS: IN(X) MM()		