



DIMENSIONS:

A	3.688" ±0.063
B	1.850" ±0.125
C	2.308" ±0.063
D	3.125" ±0.063
E	0.826" ±0.063
F	2.701" ±0.015
G	0.187" ±0.015

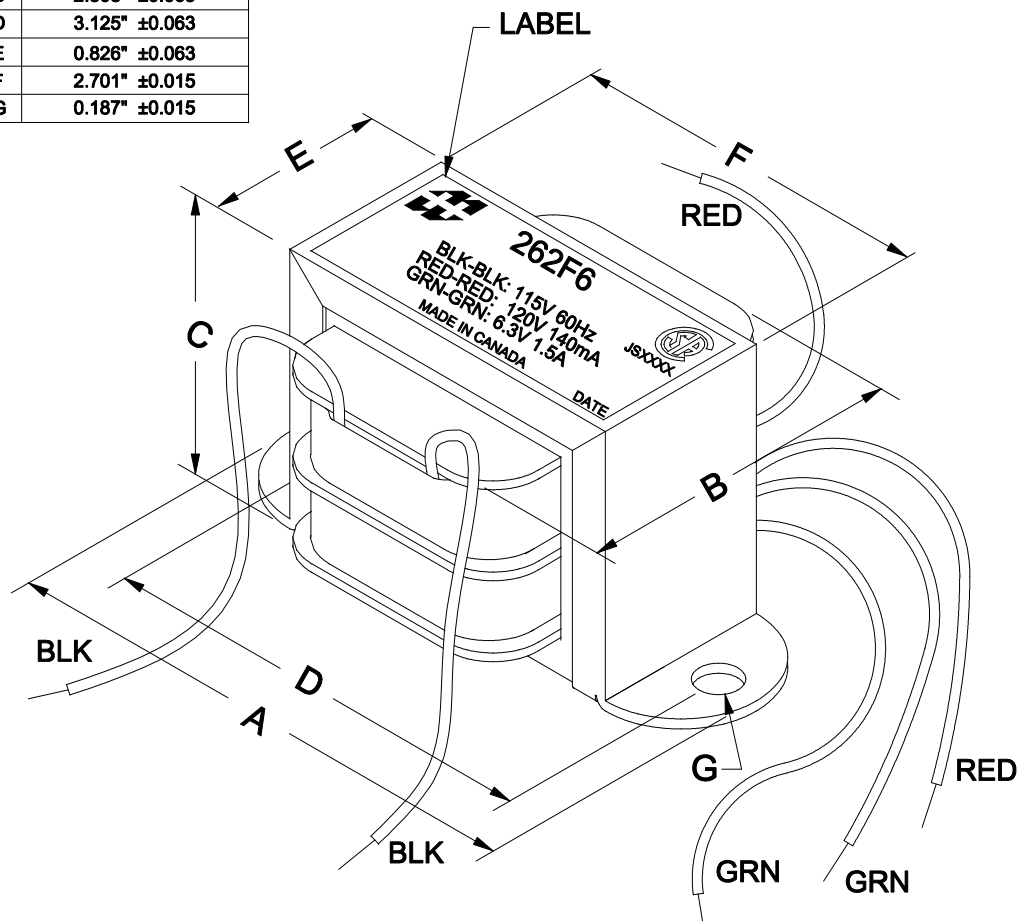

NOTE: ALL LEADS 6" OUT MIN. STRIPPED 0.5"

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 115V, 60Hz, BLK - BLK	150mA	Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK		
	RED - RED =	133.9V	±2%
	GRN - GRN =	7.138V	±2%
DCR	@ 20°C, BLK - BLK =	17.31 Ω	±20%
	@ 20°C, RED - RED =	37.57 Ω	±20%
	@ 20°C, GRN - GRN =	0.235 Ω	±20%
HIPOT	PRIMARY - SECONDARY	1500V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™				ELECTRONIC DIVISION 52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
0	RELEASED.	C.I. 02/22/16								
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER		DWG. NO. 262F6			
			DATE: 02/22/16	APP'D. BY:						
			DIMENSIONS: IN(X) MM()							