



DIMENSIONS:	
A	3.438" ±0.063
B	3.986" ±0.125
C	4.125" ±0.063
D	1.860" ±0.063
E	2.750" ±0.063
F	3.438" ±0.063
G	0.500" ±0.125

FLUX BAND

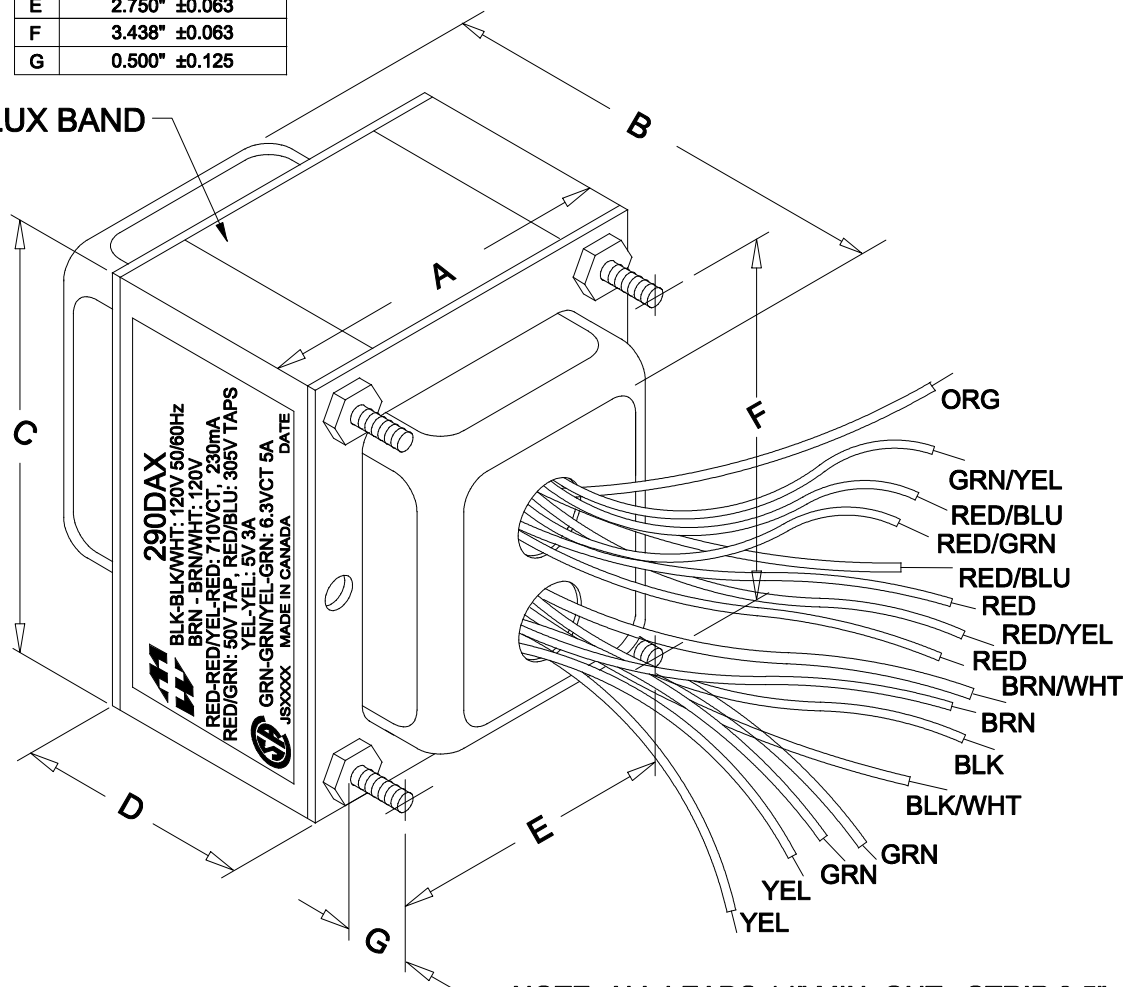

NOTE: ALL LEADS 14" MIN. OUT. STRIP 0.5"

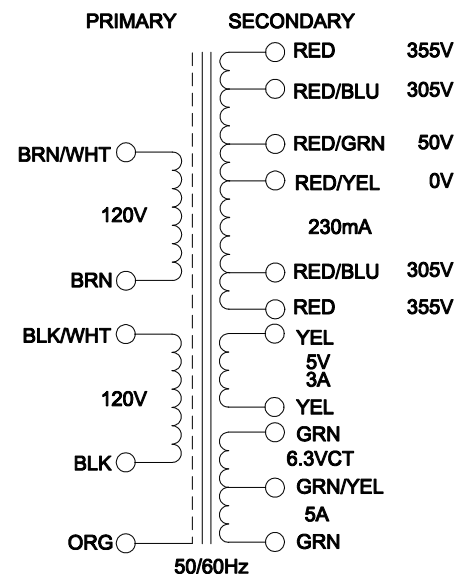

ELECTRICAL DATA:

TESTS	CONDITIONS	ACCEPTANCE CRITERIA	
I _{ex}	@ 120V, 60Hz, BLK - BLK/WHT	263mA	Max.
Sec. N.L.V	@ 120V, 60Hz, BLK - BLK/WHT		
	BRN - BRN/WHT =	120.0V	±2%
	RED - RED/YEL = RED/YEL - RED =	374.5V	±2%
	RD/BL - RD/YL = RD/YL - RD/BL =	321.8V	±2%
	RED/GRN - RED/YEL =	52.74V	±2%
	RED - RED =	749.0V	±2%
	YEL - YEL =	5.323V	±2%
	GRN - GRN/YEL = GRN/YEL - GRN =	3.387V	±2%
	GRN - GRN =	6.774V	±2%
DCR	@ 20°C, BLK - BLK/WHT =	3.050 Ω	±20%
	@ 20°C, BRN - BRN/WHT =	3.302 Ω	±20%
	@ 20°C, RED - RED =	73.53 Ω	±20%
	@ 20°C, YEL - YEL =	0.056 Ω	±20%
	@ 20°C, GRN - GRN =	0.037 Ω	±20%
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC	

REV.#	REVISION	DATE	HAMMOND ELECTRONIC DIVISION			
0	RELEASED.	C.I. 07/26/17	52 RANKIN PLACE,			
1	CORRECTED DIMENSIONS.	C.I. 03/08/21	WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER TRANSFORMER	DWG. NO. 290DAX
			DATE: 07/26/17	APP'D. BY:		
				DIMENSIONS: IN(X) MM()		