
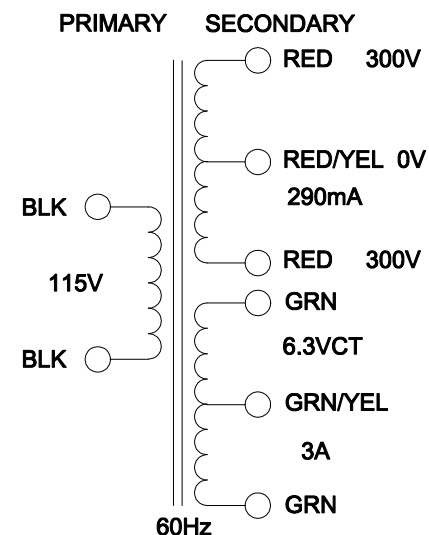


DIMENSIONS:	
A	3.750" ± 0.063
B	4.935" ± 0.125
C	4.530" ± 0.063
D	3.000" ± 0.063
E	3.813" ± 0.063
F	4.594" ± 0.063
G	0.203" X 0.375" ± 0.015

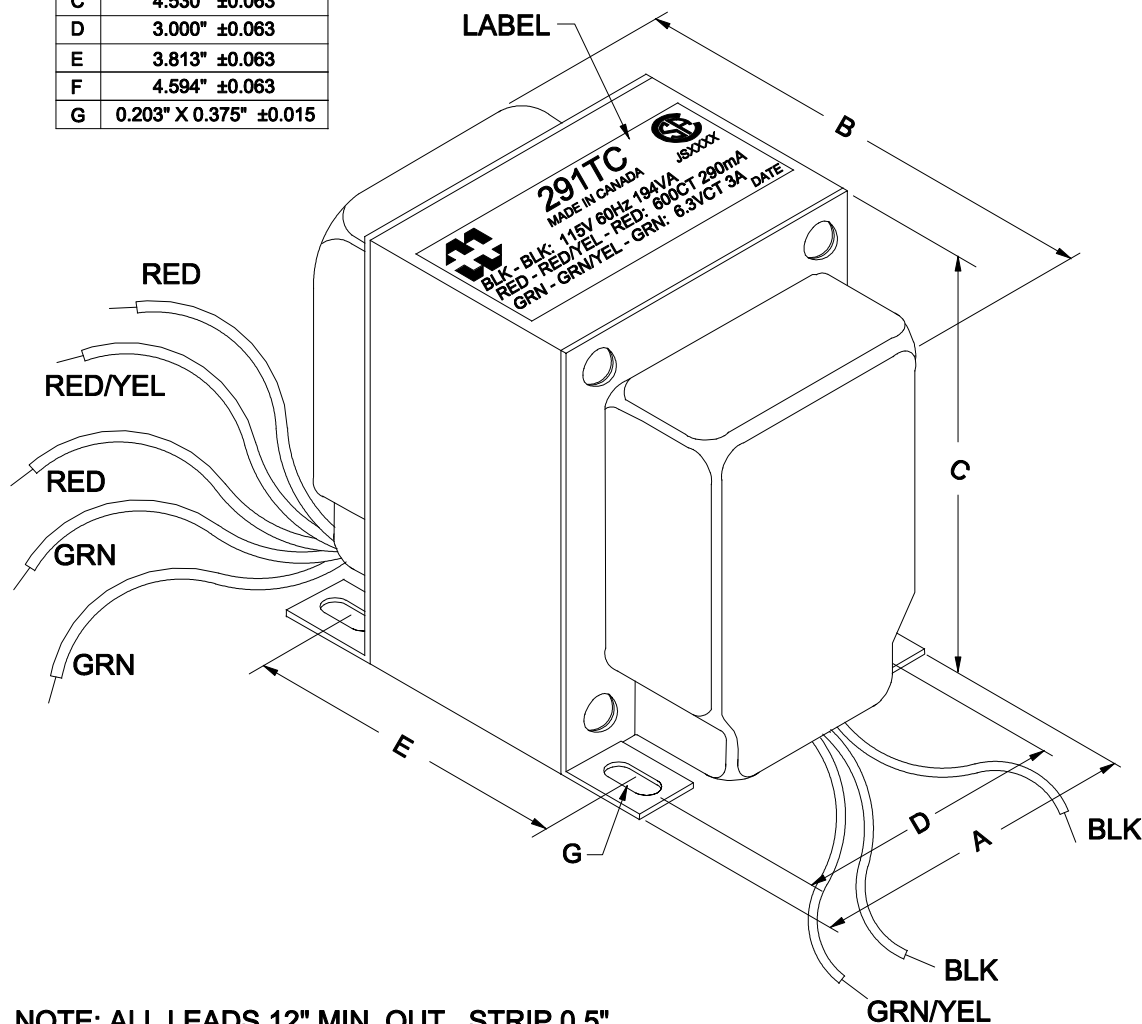

NOTE: ALL LEADS 12" MIN. OUT. STRIP 0.5"

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	525mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	RED - RED/YEL = RED/YEL - RED =	305.7V $\pm 2\%$
	RED - RED =	611.4V $\pm 2\%$
	GRN - GRN/YEL = GRN/YEL - GRN =	3.339V $\pm 2\%$
	GRN - GRN =	6.677V $\pm 2\%$
DCR	@ 20°C, BLK - BLK =	0.489 Ω $\pm 20\%$
	@ 20°C, RED - RED =	19.24 Ω $\pm 20\%$
	@ 20°C, GRN - GRN =	0.022 Ω $\pm 20\%$
HIPOT	PRIMARY - SECONDARY	3000V, 60Hz, 1 SEC

REV.#	REVISION	DATE	HAMMOND MANUFACTURING™			
0	RELEASED.	C.I. 02/03/20	ELECTRONIC DIVISION			
			52 RANKIN PLACE,			
			WATERLOO, ONTARIO, N2J 3Z5			
			PH # (519) 886-6181			
			FAX # (519) 886-9540			
			DWG. BY: C. ILIE	CHK'D BY:	TITLE: POWER	DWG. NO.
			DATE: 02/03/20	APP'D. BY:	TRANSFORMER	291TC
				DIMENSIONS: IN(X) MM()		