
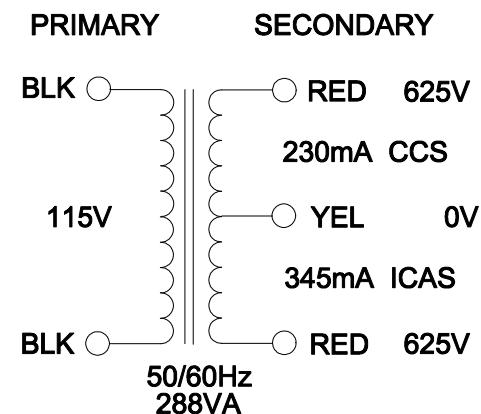


DIMENSIONS:	
A	3.750" ±0.063
B	3.936" ±0.125
C	4.530" ±0.063
D	3.000" ±0.063
E	2.813" ±0.063
G	0.203" x 0.375" ±0.015

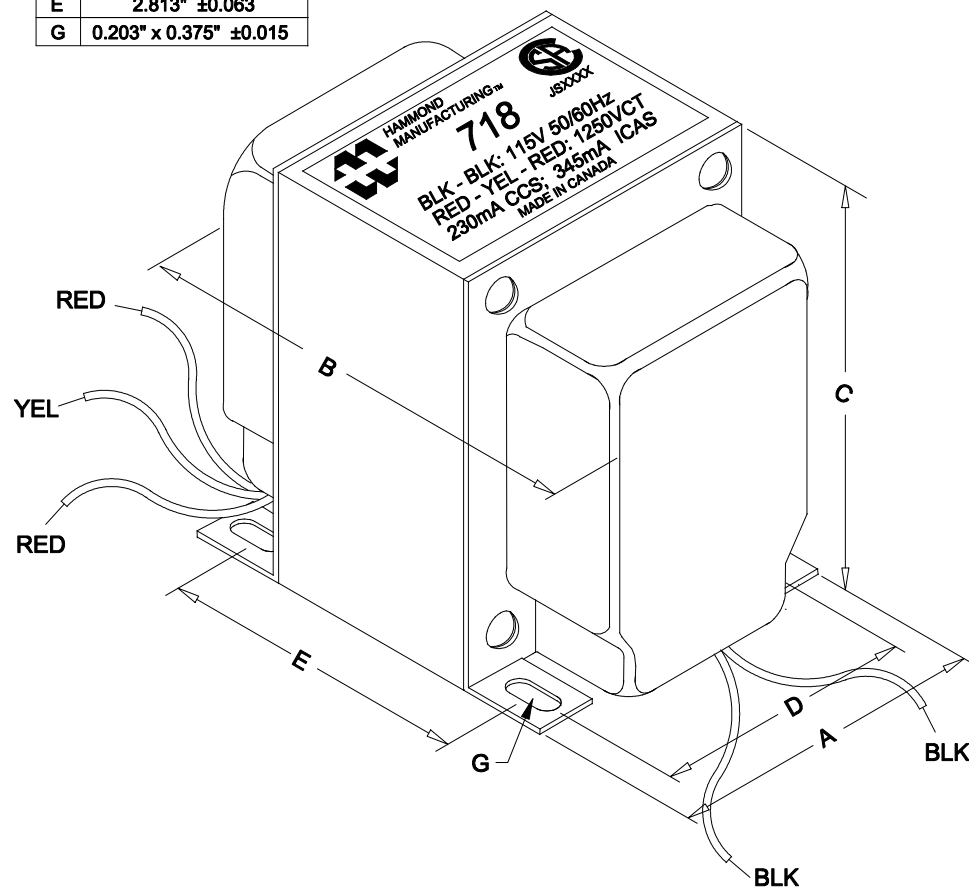

NOTE: ALL LEADS 9" OUT MIN.

ELECTRICAL DATA:		
TESTS	CONDITIONS	ACCEPTANCE CRITERIA
I _{ex}	@ 115V, 60Hz, BLK - BLK	313mA Max.
Sec. N.L.V	@ 115V, 60Hz, BLK - BLK	
	RED - RED =	1282.3V ±2%
	RED - RED/YEL = RED/YEL - RED =	641.17V ±2%
DCR	@ 20°C, BLK - BLK =	1.609 Ω ±20%
	@ 20°C, RED - RED =	126.6 Ω ±20%
HIPOT	PRIMARY - SECONDARY	2500V, 60Hz, 1 SEC

REV.#	REVISION		DATE	 HAMMOND MANUFACTURING™		ELECTRONIC DIVISION	
0	RELEASED.	C.I.	03/10/20	52 RANKIN PLACE, WATERLOO, ONTARIO, N2J 3Z5		PH # (519) 886-6181 FAX # (519) 886-9540	
				DWG. BY: C. ILIE	CHK'D BY:	TITLE: PLATE TRANSFORMER	DWG. NO. 718
				DATE: 03/10/20	APP'D. BY:		
				DIMENSIONS: IN(X) MM()			