



       
 AS/NZS 62368.1 UL62368-1 BS EN/EN62368-1 TPTC004 IEC62368-1



■ Features

- Universal AC input / Full range
- Withstand 300VAC surge input for 5 seconds
- Up to 350% peak power capability
- Built-in constant current limiting circuit
- Fanless design, Cooling by free air convection
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Built-in cooling fan ON-OFF control
- Built-in DC OK signal
- Built-in remote sense function
- Withstand 5G vibration
- Operating altitude up to 5000 meters (Note.5)
- Output voltage adjustable $\pm 15\%$ (Avg.)
- 5 years warranty


■ Applications

- Industrial automation machinery
- Industrial control system
- Mechanical and electrical equipment
- Diagnostic or biological facilities
- Test or measurement systems
- Telecommunication equipment

■ Description

HRP-600N3 series is a 600W single output AC/DC ultra-high peak power supply. This series operates at 85~264VAC input voltage and offers the models with the DC output mostly demanded from the industry. Each model is cooled by the built-in fan with fan ON-OFF control, working for the temperature up to 70°C. Moreover, HRP-600N3 can provide 350% short-duration peak power for motor applications and electromechanical loads requiring much higher power during start-up.

■ Model Encoding

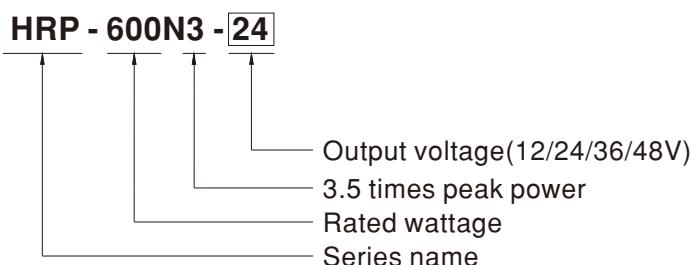




600W Ultra-High Peak Power Supply

HRP-600N3 series

SPECIFICATION

MODEL	HRP-600N3-12	HRP-600N3-24	HRP-600N3-36	HRP-600N3-48
OUTPUT	DC VOLTAGE	12V	24V	36V
	RATED CURRENT	53A	27A	17.5A
	CURRENT RANGE	0 ~ 53A	0 ~ 27A	0 ~ 17.5A
	RATED POWER	636W	648W	630W
	RIPPLE & NOISE (max.) Note.2	200mVp-p	150mVp-p	200mVp-p
	VOLTAGE ADJ. RANGE	10.2 ~ 13.8V	21.6 ~ 28.8V	28.8 ~ 39.6V
	VOLTAGE TOLERANCE Note.3	±1.0%	±1.0%	±1.0%
	LINE REGULATION	±0.3%	±0.2%	±0.2%
	LOAD REGULATION	±0.5%	±0.5%	±0.5%
	SETUP, RISE TIME	1800ms, 50ms/230VAC	3600ms, 50ms/115VAC at full load	
INPUT	HOLD UP TIME (Typ.)	16ms/230VAC	16ms/115VAC at full load	
	VOLTAGE RANGE Note.4	85 ~ 264VAC	120 ~ 370VDC	
	FREQUENCY RANGE	47 ~ 63Hz		
	POWER FACTOR (Typ.)	PF>0.94/230VAC	PF>0.98/115VAC at full load	
	EFFICIENCY (Typ.)	88%	88%	89%
	AC CURRENT (Typ.)	7.6A/115VAC	3.6A/230VAC	
PROTECTION	INRUSH CURRENT (Typ.)	35A/115VAC	70A/230VAC	
	LEAKAGE CURRENT	<2mA / 240VAC		
	OVERLOAD	Output power >105% rated for more than 5 seconds then shut down o/p voltage, re-power on to recover		
		Constant current limiting for output power >380% rated for more than 5 seconds and then shut down o/p voltage, re-power on to recover		
FUNCTION	OVER VOLTAGE	14.4 ~ 16.8V	30 ~ 34.8V	41.4 ~ 48.6V
		Protection type : Shut down o/p voltage, re-power on to recover		
	OVER TEMPERATURE	Shut down o/p voltage, recovers automatically after temperature goes down		
ENVIRONMENT	DC OK SIGNAL	PSU turn on : 3.3 ~ 5.6V ; PSU turn off : 0 ~ 1V		
	FAN CONTROL (Typ.)	Load 35±15% or RTH2≥50°C Fan on		
SAFETY & EMC (Note 6)	WORKING TEMP.	-40 ~ +70°C (Refer to "Derating Curve")		
	WORKING HUMIDITY	20 ~ 90% RH non-condensing		
	STORAGE TEMP., HUMIDITY	-40 ~ +85°C, 10 ~ 95% RH non-condensing		
	TEMP. COEFFICIENT	±0.03%/°C (0 ~ 50°C)		
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, 60min. each along X, Y, Z axes		
SAFETY & EMC (Note 6)	OPERATING ALTITUDE Note.5	5000 meters		
	SAFETY STANDARDS	UL62368-1, TUV BS EN/EN62368-1, EAC TP TC 004, AS/NZS 62368.1 approved		
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:2KVAC O/P-FG:0.5KVAC		
	ISOLATION RESISTANCE	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH		
	EMC EMISSION	Parameter	Standard	Test Level / Note
		Conducted	BS EN/EN55032	Class B
		Radiated	BS EN/EN55032	Class B
		Harmonic current	BS EN/EN61000-3-2	Class A
	EMC IMMUNITY	Voltage Flicker	BS EN/EN61000-3-3	----
		BS EN/EN55035 , BS EN/EN61000-6-2(BS EN/EN50082-2)		
		Parameter	Standard	Test Level / Note
		ESD	BS EN/EN61000-4-2	Level 3, 8KV air; Level 2, 4KV contact
		RF field	BS EN/EN61000-4-3	Level 3, 10V/m
		EFT/ Burst	BS EN/EN61000-4-4	Level 3, 2KV
		Surge	BS EN/EN61000-4-5	Level 4, 4KV/Line-FG; 2KV/Line-Line
		Conducted	BS EN/EN61000-4-6	Level 3, 10V
OTHERS	Magnetic Field	BS EN/EN61000-4-8		
	Voltage Dips and Interruptions	95% dip 0.5 periods, 30% dip 25 periods, 95% interruptions 250 periods		
	MTBF	452.04K hrs min. Telcordia TR/SR-332 (Bellcore); 191.26K hrs min. MIL-HDBK-217F (25°C)		
NOTE	DIMENSION	218*105*61.5mm (L*W*H)		
	PACKING	1.39Kg;8pcs/12.1Kg/1.58CUFT		
1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Derating may be needed under low input voltages. Please check the derating curve for more details. 5. The ambient temperature derating of 3.5°C/1000m with fanless models and of 5°C/1000m with fan models for operating altitude higher than 2000m(6500ft). 6. The power supply is considered a component which will be installed into a final equipment. All the EMC tests are been executed by mounting the unit on a 360mm*360mm metal plate with 1mm of thickness. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies." (as available on http://www.meanwell.com) ※ Product Liability Disclaimer : For detailed information, please refer to https://www.meanwell.com/serviceDisclaimer.aspx				

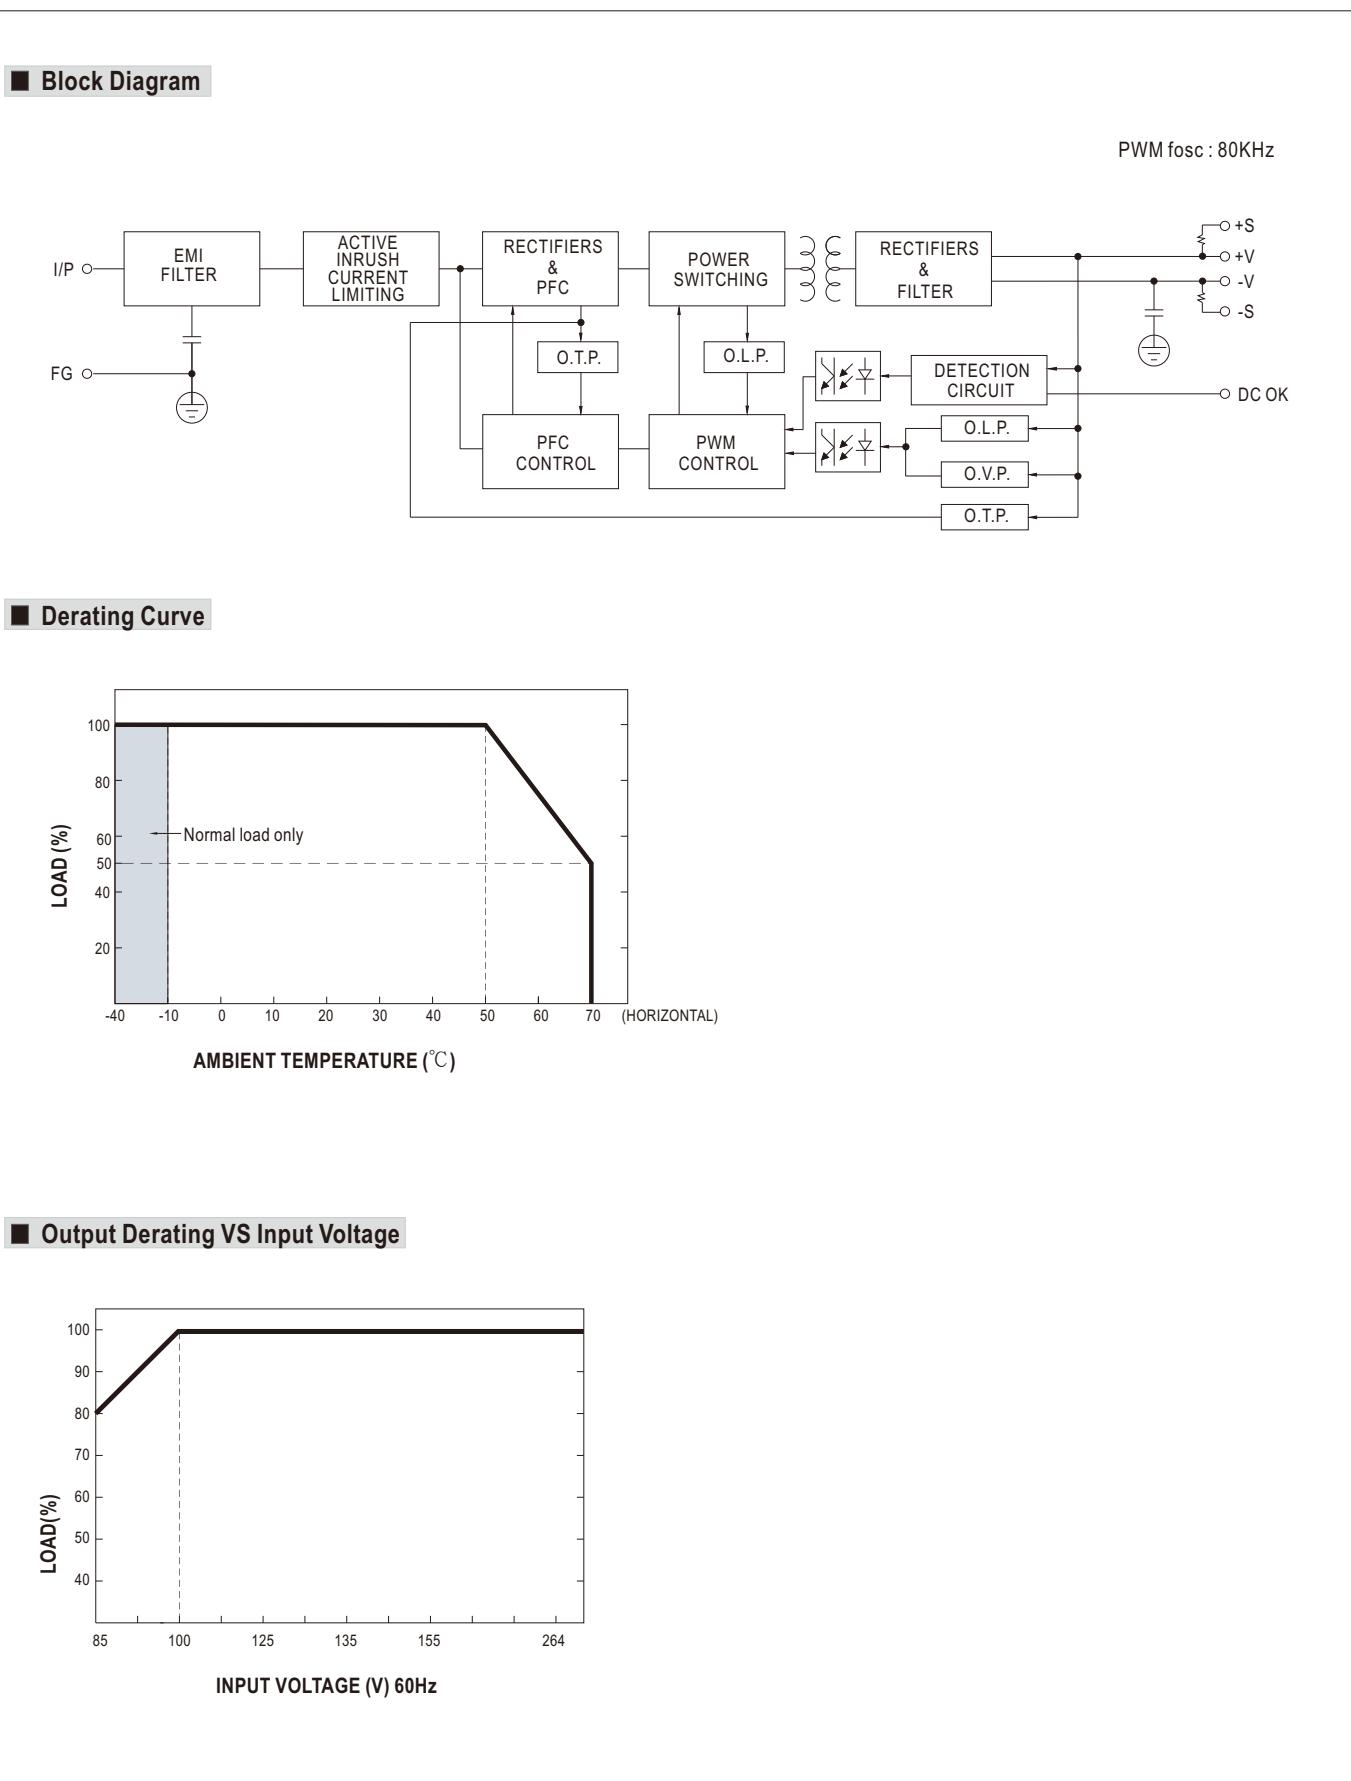


■ Function Manual

1. Peak Power

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} \leq P_{rated}$$

$$\text{Duty} = \frac{t}{T} \times 100\% \leq 35\%$$

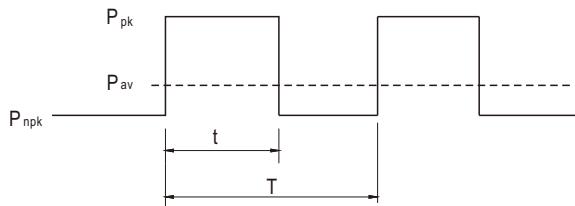

P_{av} : Average output power (W)

P_{pk} : Peak output power (W)


P_{npk} : Non-peak output power (W)

P_{rated} : Rated output power (W)

t : Peak power width (sec)

T : Period (sec)

(a) If 3.5 times peak is required, please see below figure ($t \leq 5\text{sec}$)

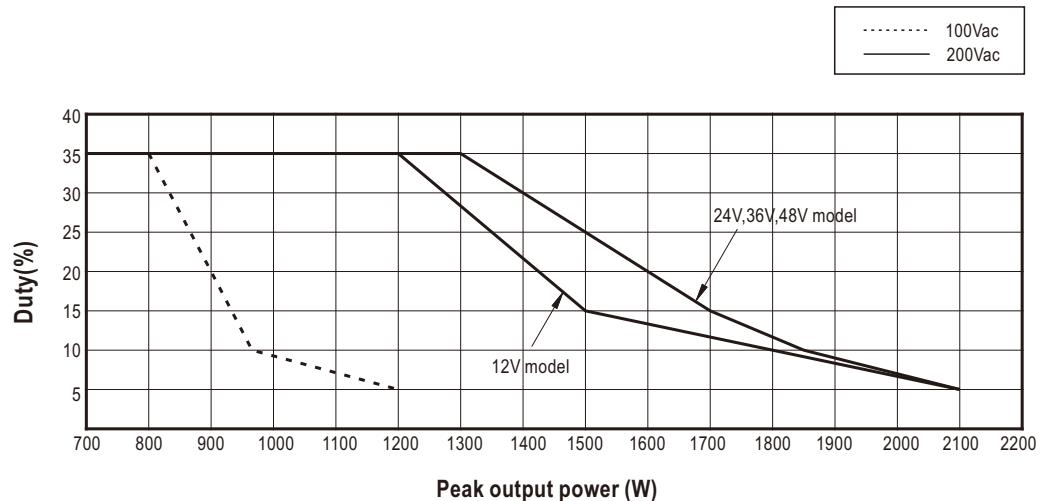

For example (24V model) :

$V_{in} = 200V$ $\text{Duty}_{\text{max}} = 25\%$

$P_{av} = P_{rated} = 648W$

$P_{pk} = 1500W$

$t \leq 5\text{ sec}$

$$T \geq \frac{5\text{ sec}}{25\%} \geq 20\text{ sec}$$

$$P_{av} = \frac{P_{pk} \times t + P_{npk} \times (T-t)}{T} = \frac{1500 \times 5 + P_{npk}(20-5)}{20} \leq 648W$$

$$P_{npk} \leq 364W$$

2. Remote Sense

The remote sensing compensates voltage drop on the load wiring up to 0.5V.

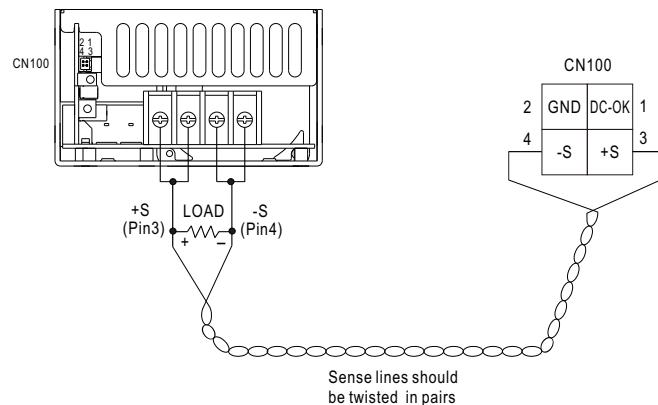


Fig 1.1

3. DC-OK Signal

DC-OK signal is a TTL level signal. High when PSU turns on.

Between DC-OK(pin1) and GND(pin2)	Output Status
3.3 ~ 5.6V	ON
0 ~ 1V	OFF


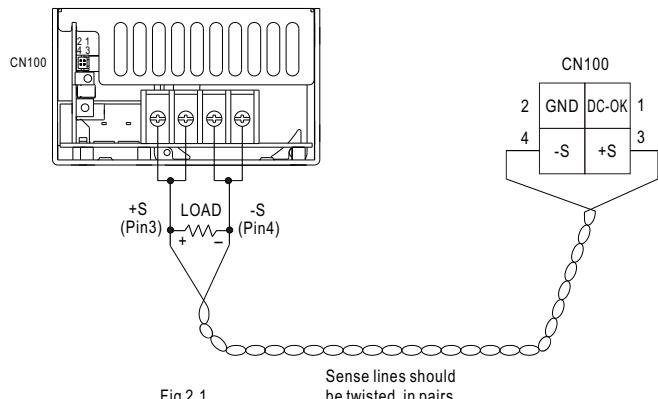


Fig 2.1

■ Mechanical Specification

Case No. 977A Unit:mm

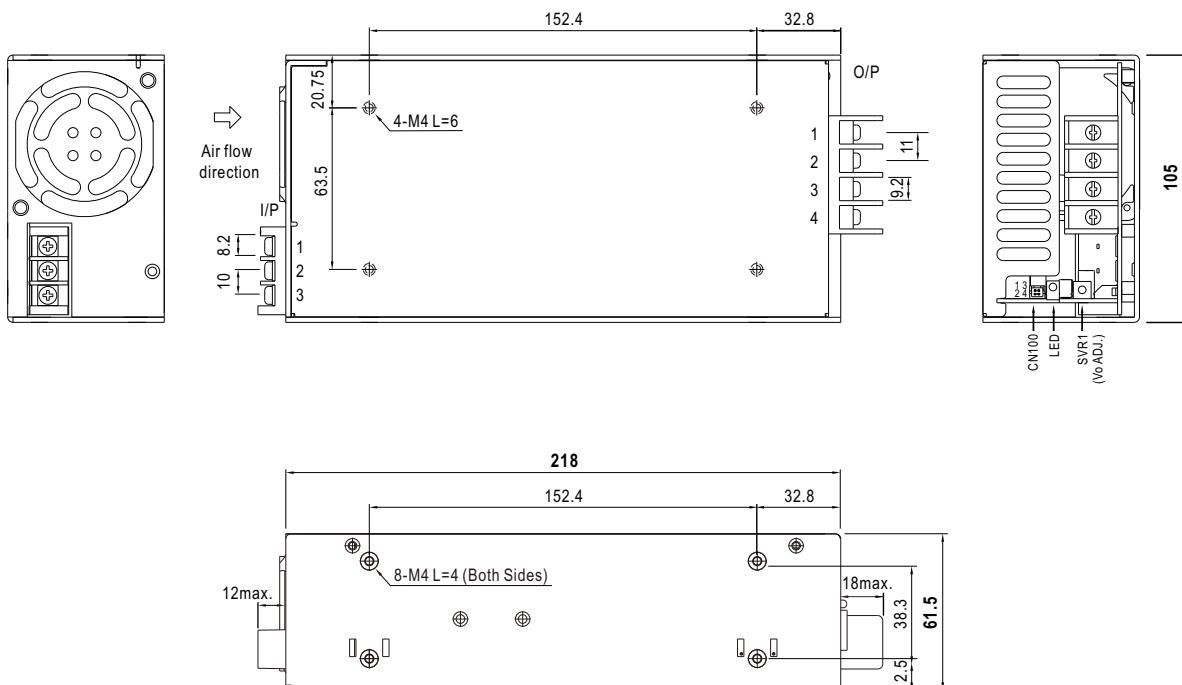

AC Input Terminal Pin No.
Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG \pm

DC Output Terminal Pin No.
Assignment

Pin No.	Assignment
1~2	-V
3~4	+V

Connector Pin No. Assignment(CN100) : HRS DF11-4DP-2DS or equivalent

Pin No.	Assignment	Mating Housing	Terminal
1	DC-OK		
2	GND		
3	+S	HRS DF11-4DS or equivalent	HRS DF11-**SC or equivalent
4	-S		

■ Installation Manual

Please refer to : <http://www.meanwell.com/manual.html>