

Distributed by:









www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 738785

LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
AD	39				N	REV PER 063C-0506-04	11NOV04	JR/DS

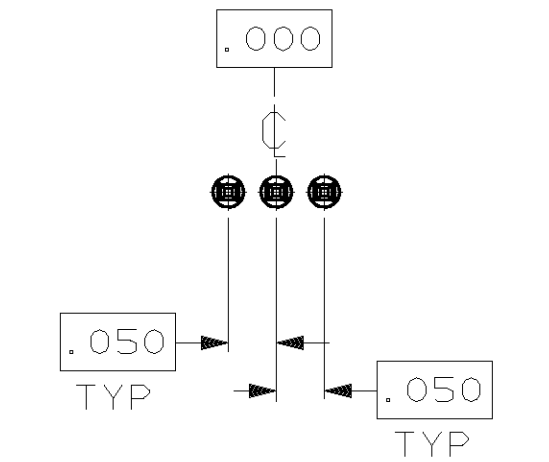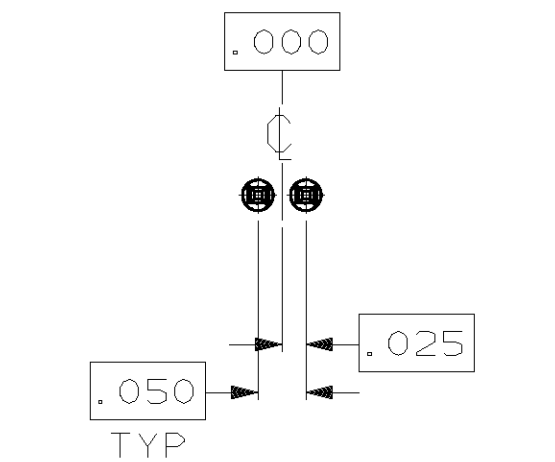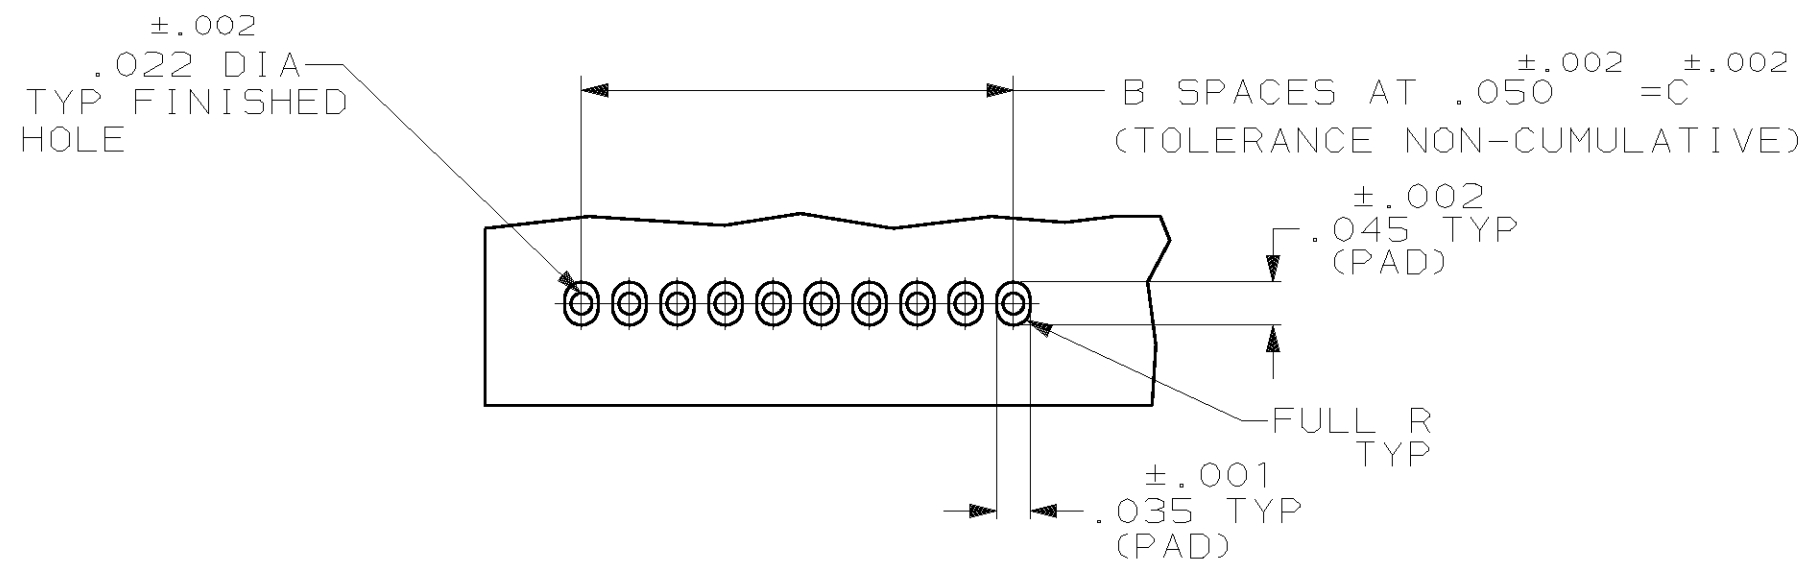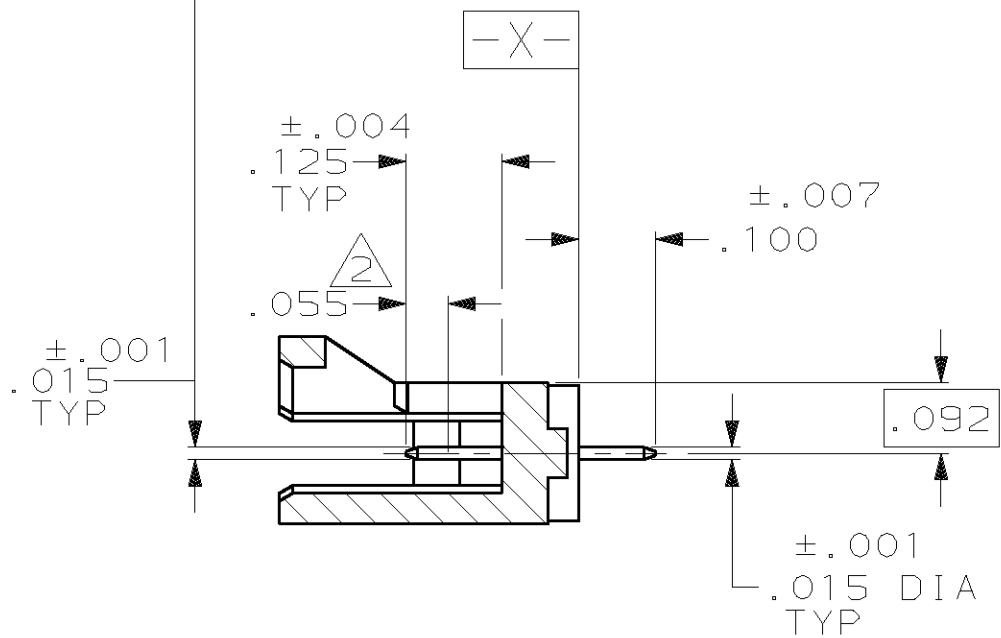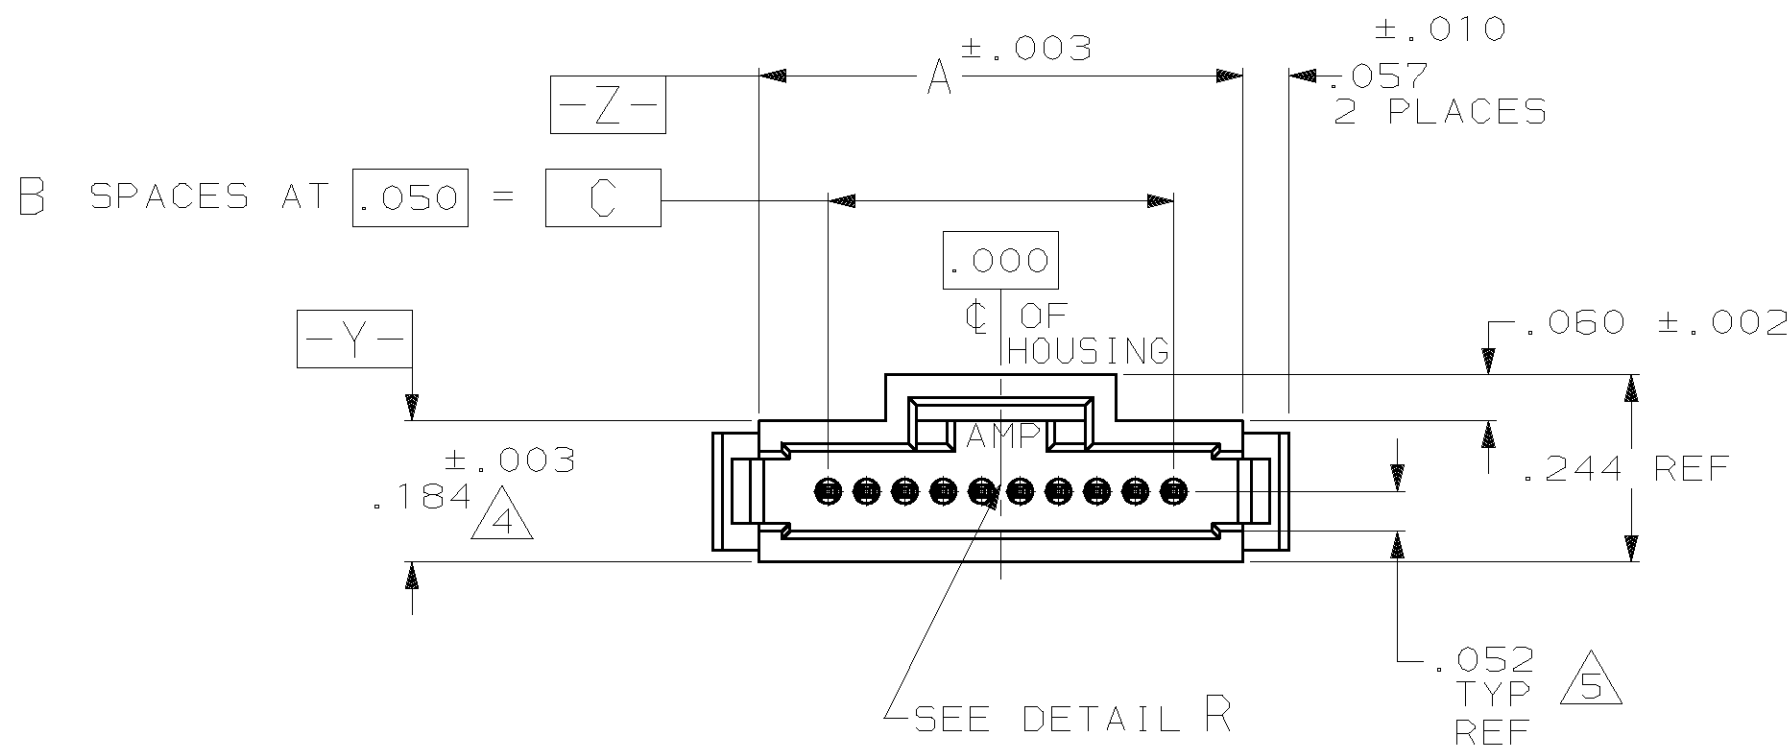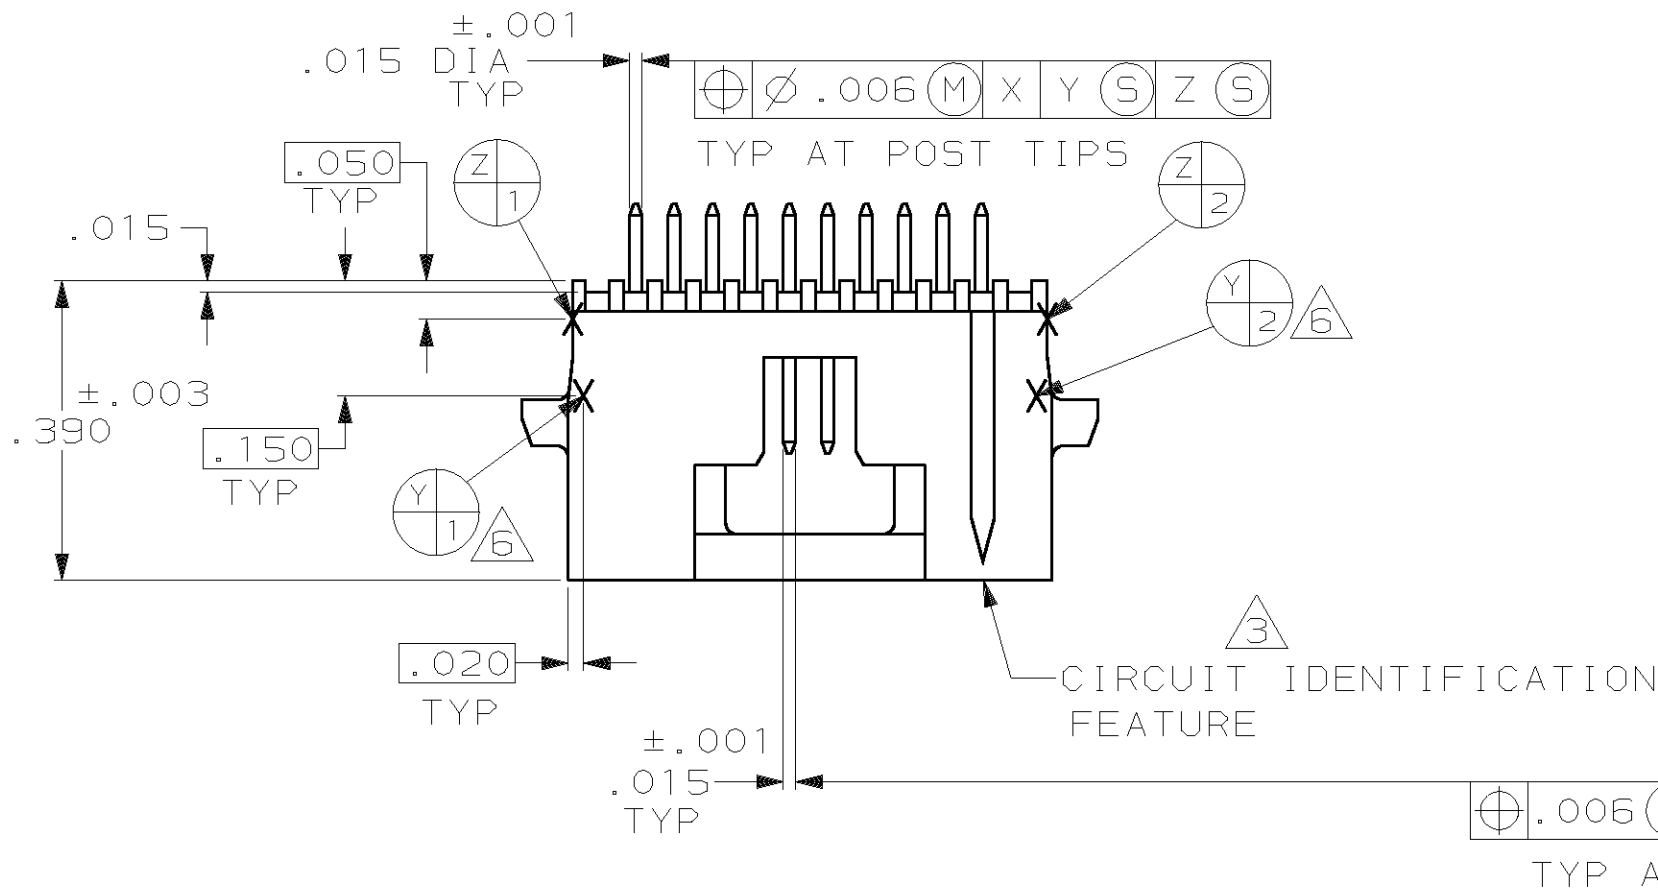

- CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN-LEAD, ALL OVER .000050 NICKEL
- POINT OF MEASUREMENT FOR GOLD THICKNESS
- CIRCUIT IDENTIFICATION FEATURE OMITTED ON 4,5,6 AND 7 POSITION HEADER ASSEMBLIES
- DIMENSION APPLIES AT BASE OF SHROUD
- THE NOTED DIMENSIONS APPLY AT THE INTERSECTION OF THE POST & HOUSING
- ARE LOCATED THE SAME AS (Y 1/3, Y 1/4, Y 1/1, Y 1/2) EXCEPT ON OPPOSITE SIDE OF HOUSING
- CONTACT AREAS PLATED WITH .000030 GOLD, SOLDER TAILS PLATED WITH .000150 TIN, ALL OVER .000050 NICKEL

1.250	25	1.430	26	7-104071-0
2.450	49	2.630	50	6-104071-9
2.200	44	2.380	45	6-104071-8
1.950	39	2.130	40	6-104071-7
1.750	35	1.930	36	6-104071-6
1.300	26	1.480	27	6-104071-5
1.050	21	1.230	22	6-104071-4
.800	16	.980	17	6-104071-3
.600	12	.780	13	6-104071-2
.550	11	.730	12	6-104071-1
.350	7	.530	8	6-104071-0
.300	6	.480	7	5-104071-9
.250	5	.430	6	5-104071-8
.150	3	.330	4	5-104071-7
1.450	29	1.630	30	5-104071-6
1.200	24	1.380	25	5-104071-5
.950	19	1.130	20	5-104071-4
.700	14	.880	15	5-104071-3
.200	4	.380	5	5-104071-2
.450	9	.630	10	5-104071-1
1.250	25	1.430	26	2-104071-0
2.450	49	2.630	50	1-104071-9
2.200	44	2.380	45	1-104071-8
1.950	39	2.130	40	1-104071-7
1.750	35	1.930	36	1-104071-6
1.300	26	1.480	27	1-104071-5
1.050	21	1.230	22	1-104071-4
.800	16	.980	17	1-104071-3
.600	12	.780	13	1-104071-2
.550	11	.730	12	1-104071-1
.350	7	.530	8	1-104071-0
.300	6	.480	7	104071-9
.250	5	.430	6	104071-8
.150	3	.330	4	104071-7
1.450	29	1.630	30	104071-6
1.200	24	1.380	25	104071-5
.950	19	1.130	20	104071-4
.700	14	.880	15	104071-3
.200	4	.380	5	104071-2
.450	9	.630	10	104071-1
C	B	A	NO OF POSN	PART NUMBER

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES TOLERANCES ON : 2 PLC DEC ± . 3 PLC DEC ± .005 ANGLES ± -			DR 12-19-88 K. HELM CHK 12-19-88 H. MOLL APPD 12-19-88 R. DURBIN		AMP INCORPORATED Harrisburg, Pa. 17105		
MATERIAL HOUSING: THERMOPLASTIC COLOR-BLACK CONTACT: COPPER ALLOY			APPD 12-19-88 W. PARKER PRODUCT SPEC 108-1093		NAME HEADER ASSEMBLY, VERTICAL, SINGLE ROW, W/SIDE & END LATCHES, AMPMODU® System 50		
FINISH			APPLICATION SPEC 114-25031		SIZE D	FSCM NO 00779	DRAWING NO 104071
WEIGHT			SCALE 4:1		SHEET 1 OF 1		