




TOP VIEW

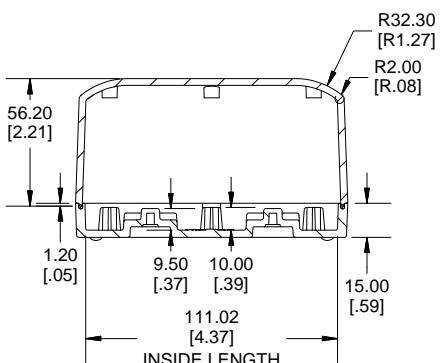


SECTION B-B
SIDE VIEW

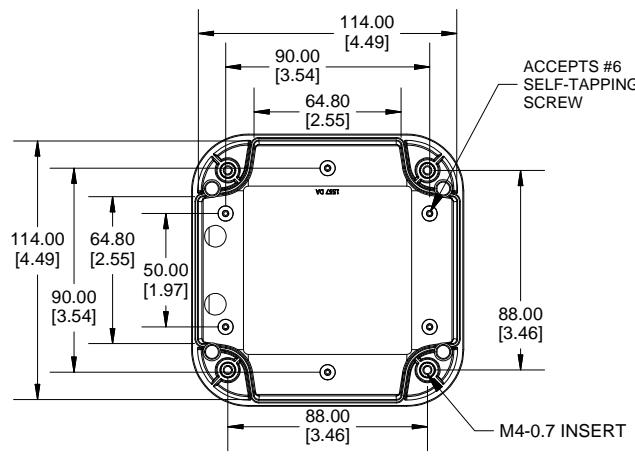


INSIDE LID

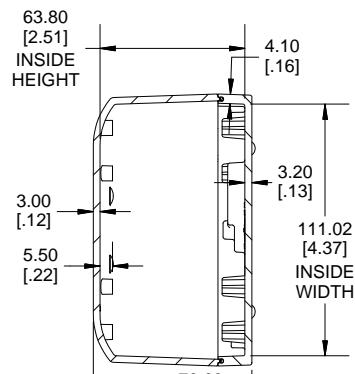


SECTION A-A
END VIEW

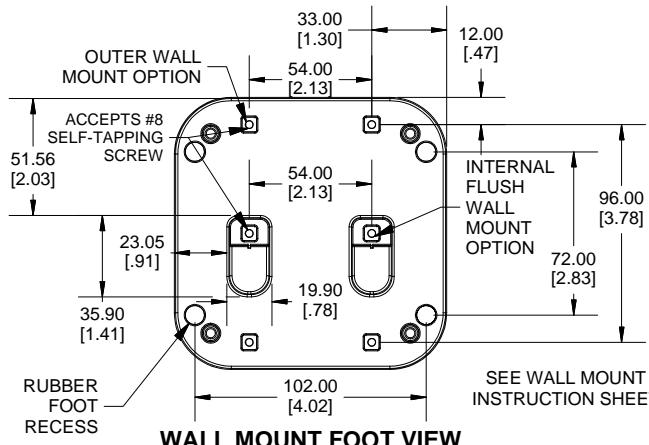

WALL MOUNT FOOT VIEW

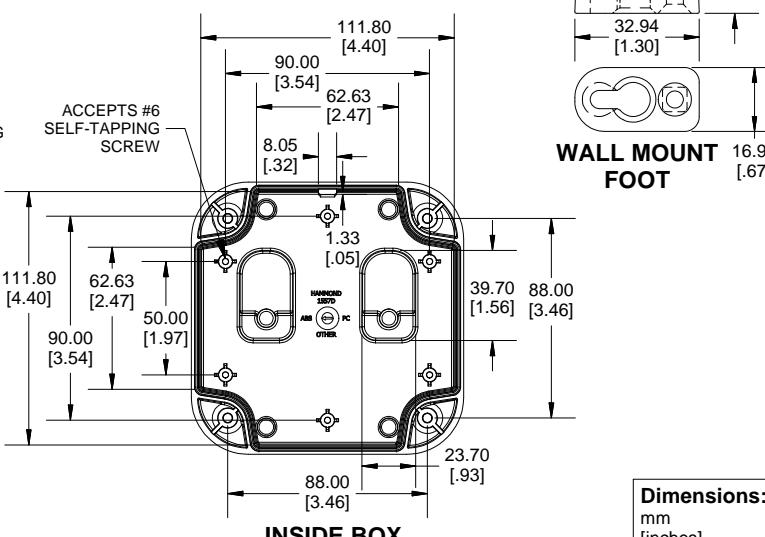

INSIDE BOX

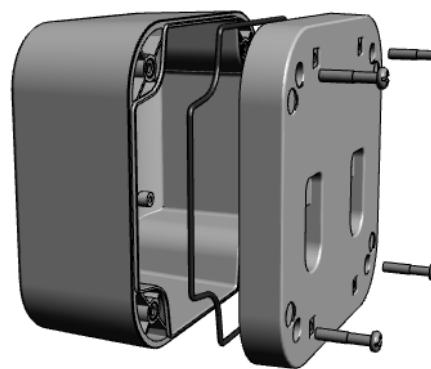

POLYCARBONATE
VERSION ONLY
cUL US LISTED
FILE #E65324
TYPE 4,4X,6,6P

Enclosures can be Factory Modified (Milling, Drilling, Printing etc.)
Contact Factory (modshop@hammf.com) for quotes
Solid models of this enclosure available in .stp or .x_t.
(Part number and text placement/orientation on our products are subject to change,
we do not recommend using them as a locating reference for modification purposes)

NOTE

Purchased assembly includes box, lid, 4 cover screws, preformed silicone gasket,
4 rubber feet, 4 wall mount foot screws, and 4 wall mount feet.
General Purpose ABS version is not UL approved. (Matl UL94 - HB)
Polycarbonate version is UL 508A approved. (Matl UL94 - 5VA @ 3mm)

Recommended Cover Screw Torque - 71-85 ozf-in (50-60 cN-m)

1557

1557DA Enclosure

General Purpose ABS Black Enclosure	1557DABK
General Purpose ABS Grey Enclosure	1557DAGY
Polycarbonate Black Enclosure	1557DA2BK
Polycarbonate Grey Enclosure	1557DA2GY

ACCESSORIES

Silicone Pre-formed Gasket Black (Pkg 2)	1557DGASKET
Clear Rubber Feet (Pkg 24)	1421T6CL
Stainless Steel Cover Screws [M4-0.7 X 20mm] (Pkg 50)	SC576-50
Steel P.C. Board Screw [#6 X 1/4" Self Tapping] (Pkg 50)	SC526-50
Stainless Steel Wall Mount foot Screw [#8 X 3/8" Self Tapping] (Pkg 50)	SC556-50
Wall Mout Foot Kit [wall mount foot] (Pkg 24)	1557FOOTGY-24
General Purpose ABS Black	1557FOOTBK-24
POLYCARBONATE Grey	1557FOOT2GY-24
POLYCARBONATE Black	1557FOOT2BK-24



HAMMOND
MANUFACTURING®
1557DA

www.hammrndmf.com

REV: 05.08.2022