

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 644818


Date	Rev.	Description

Standard : WORLDWIDE STANDARD

RG-174 /U COAXIAL CABLE (644818&644826)

TYPE : 7/0.16+5/0.10T*16

1.Conductor	Material	Bare Copper Wire
	Stranded	7/0.16
2.Insulation	Material	PE
	Thickness	0.52mm ± 0.02mm
	OD:	1.52mm ± 0.04mm
3.Braid	Material	Tinned Copper Wire
	Stranded	16/5/0.10mm
	Coverage	98%
4.Jacket	Material	PVC
	OD:	2.54mm ± 0.05mm
.Impedance ohm		50 ohms ± 3 OHM

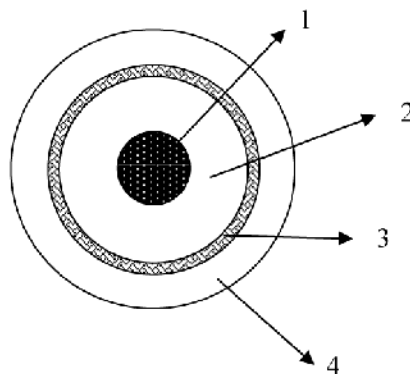

DCC. NO.
A4 DRAWING NO.

MATERIAL		GOLDSUN ELECTRONICS CO., LTD.		
		JAMECO NO.	GOLDSUN NO.	
		644818	RG-174/U	
DRAWN: Kiki Chen		Description		Rev.
VERIFY PEOPLE: Ada Zheng , Ivy Lan		COAXIAL CABLE		1
		UNIT: mm	SCALE:	CAS No: ERN No:
			SHEET 1 OF 1	