

Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 644826

Date	Rev.	Description

Standard : WORLDWIDE STANDARD
 RG-174 /U COAXIAL CABLE (644818&644826)
 TYPE : 7/0.16+5/0.10T*16

1.Conductor	Material	Bare Copper Wire
	Stranded	7/0.16
2.Insulation	Material	PE
	Thickness	0.52mm ± 0.02mm
	OD:	1.52mm ± 0.04mm
3.Braid	Material	Tinned Copper Wire
	Stranded	16/5/0.10mm
	Coverage	98%
4.Jacket	Material	PVC
	OD:	2.54mm ± 0.05mm
.Impedance ohm		50 ohms ± 3 OHM

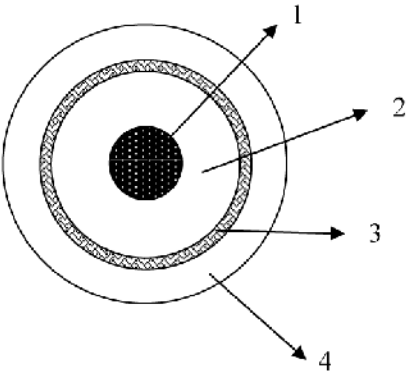

DCC. NO.
A4 DRAWING NO.

MATERIAL DRAWN: Kiki Chen VERIFY PEOPLE: Ada Zheng , Ivy Lan	GOLDSUN ELECTRONICS CO., LTD.			
	JAMECO NO.		GOLDSUN NO.	
	644826		RG-174/U	
	Description			Rev.
	COAXIAL CABLE			1
UNIT:	SCALE:	SHEET 1 OF 1	CAS No:	
mm			ERN No:	