

Primary Lithium Battery

CP603146

3.0V [Li-MnO₂]



BENEFITS

- High Voltage Response, Stable during most of the Lifetime of the Application
- Energy Density up to 830Wh/L
- Wide Operating Temperature Range (-40°C ~+70°C)
- Low Self-discharge Rate (less than 2% per year of storage at +20°C)

KEY FEATURES

- Optimized Battery Structure, Full Discharge Capacity
- Super Long Endurance
- No Passivation
- GB 8897.4-2008、IEC 60086.4:2014 and RoHS
- Easy to Recover

MAIN APPLICATIONS

- Security System
- Smart Metering
- RFID and Tracking System
- Wireless Transmitting
- Smart Home Devices
- Military Devices

Cell References Data

Electrical characteristics

Open circuit voltage (at 23±2°C) **≥3.10V**

Nominal capacity **1950mAh**

(At +25°C, battery discharged at continuous current 5mA until voltage reaches cut-off voltage 2.0V. The capacity can vary at different temperature, discharge current or cut-off voltage.)

Maximum continuous current **800mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity.)

Maximum pulse discharge current **1000mA**

(At +25°C, 2.0V cut-off, battery discharged for minimum 50% of rated capacity with max pulse for 3 seconds after 27 seconds break. The discharged capacity may vary according to the pulse characteristics, the temperature, and the cell's previous history. Fitting the cell with a capacitor may be recommended in severe conditions. Consult HCB.)

Storage (recommended) **≤30°C**

(for more severe conditions. Consult HCB) **≤75%RH**

Operating temperature range **-40°C~+70°C**

(Operation above ambient T may lead to reduced capacity and lower voltage readings at the beginning of pulses. Consult HCB)

Primary Lithium Battery

CP603146


3.0V [Li-MnO₂]



Physical characteristics

Width (max)	31.0mm
Height (max)	46.0mm
Thickness (max)	6.20mm
Typical weight	16.00g
Li metal content	0.57g

MSDS as per request
Diode(1N4007, 1N5819)
PTC(SRS175...)
Tag, wire, connector, etc. available

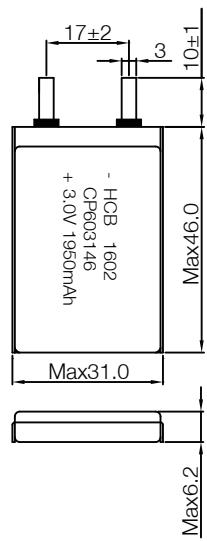


Dimensions in mm (GB1804-m)


WARNING:

- Do Not Short Circuit
- Do Not Recharge
- Do Not Puncture
- Do Not Crush
- Do Not Dismantle
- Do Not Incinerate
- Do Not Mix New and Used Batteries
- Do Not Heat Above 100°C


1.Typical discharge profiles at 23±2°C (at mid-discharge)

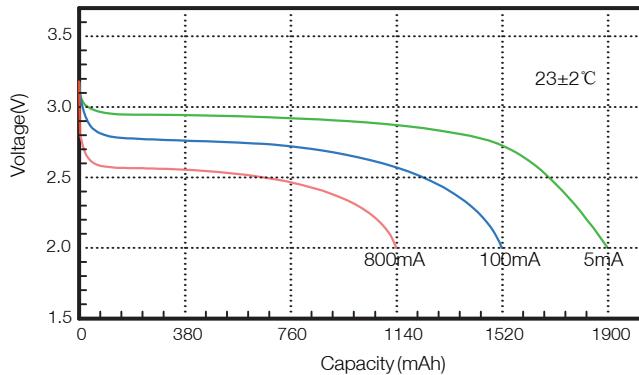

2.Typical discharge profiles with different current (at discharge stable phase)

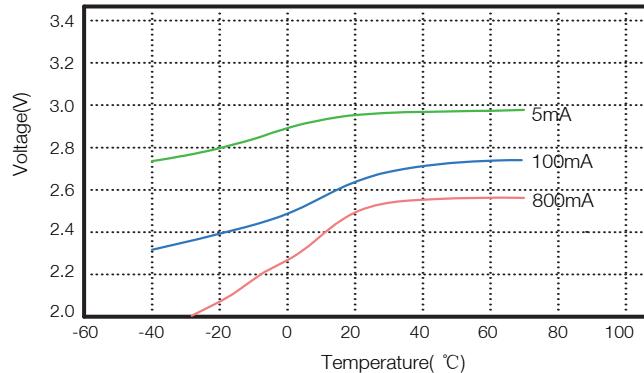

3.Storage characteristics

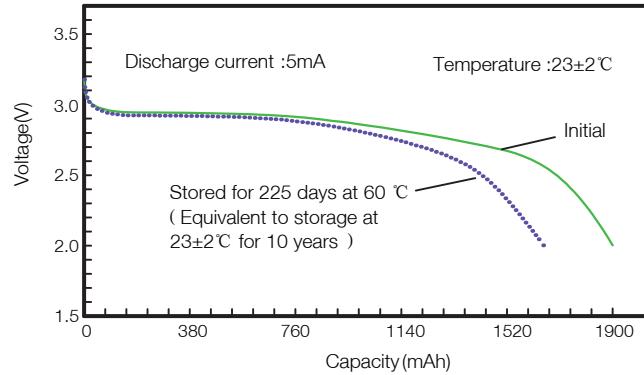

HCB BATTERY CO., LTD

Add: Special No 1. Taizhong Avenue, Gaoqiao Industrial Park,
Wujiashan Economic Development Zone, Wuhan, P.R.China

P.O.: 430040
Tel: +86(0)27 83248452
Fax: +86(0)27 83248455

Email: haocheng@cnhcb.com
Web: www.cnhcb.com
No.: HCB-MKT.PM-S[V2.0 2018 02]