

Distributed by:

**JAMECO**<sup>®</sup>  
ELECTRONICS

**www.Jameco.com ♦ 1-800-831-4242**

The content and copyrights of the attached  
material are the property of its owner.

Jameco Part Number 895174

## CMOS Dual Monostable Multivibrator

High-Voltage Types (20-Volt Rating)

■ CD4098B dual monostable multivibrator provides stable retriggerable/resettable one-shot operation for any fixed-voltage timing application.

An external resistor ( $R_X$ ) and an external capacitor ( $C_X$ ) control the timing for the circuit. Adjustment of  $R_X$  and  $C_X$  provides a wide range of output pulse widths from the Q and  $\bar{Q}$  terminals. The time delay from trigger input to output transition (trigger propagation delay) and the time delay from reset input to output transition (reset propagation delay) are independent of  $R_X$  and  $C_X$ .

Leading-edge-triggering (+TR) and trailing-edge-triggering (–TR) inputs are provided for triggering from either edge of an input pulse. An unused +TR input should be tied to  $V_{SS}$ . An unused –TR input should be tied to  $V_{DD}$ . A RESET (on low level) is provided for immediate termination of the output pulse or to prevent output pulses when power is turned on. An unused RESET input should be tied to  $V_{DD}$ . However, if an entire section of the CD4098B is not used, its RESET should be tied to  $V_{SS}$ . See Table I.

In normal operation the circuit triggers (extends the output pulse one period) on the application of each new trigger pulse. For operation in the non-retriggerable mode,  $\bar{Q}$  is connected to –TR when leading-edge triggering (+TR) is used or Q is connected to +TR when trailing-edge triggering (–TR) is used.

The time period (T) for this multivibrator can be approximated by:  $T_X = \frac{1}{2} R_X C_X$  for  $C_X \geq 0.01 \mu F$ . Time periods as a function of  $R_X$  for values of  $C_X$  and  $V_{DD}$  are given in Fig. 8. Values of T vary from unit to unit and as a function of voltage, temperature, and  $R_X C_X$ .

The minimum value of external resistance,  $R_X$ , is 5 k $\Omega$ . The maximum value of external capacitance,  $C_X$ , is 100  $\mu F$ . Fig. 9 shows time periods as a function of  $C_X$  for values of  $R_X$  and  $V_{DD}$ .

The output pulse width has variations of  $\pm 2.5\%$  typically, over the temperature range of  $-55^\circ C$  to  $125^\circ C$  for  $C_X = 1000$  pF and  $R_X = 100$  k $\Omega$ .

For power supply variations of  $\pm 5\%$ , the output pulse width has variations of  $\pm 0.5\%$  typically, for  $V_{DD} = 10$  V and 15 V and  $\pm 1\%$  typically, for  $V_{DD} = 5$  V at  $C_X = 1000$  pF and  $R_X = 5$  k $\Omega$ .

These types are supplied in 16-lead hermetic dual-in-line ceramic packages (F3A suffix), 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline packages (M, M96, and MT suffixes), and 16-lead thin shrink small-outline packages (PW and PWR suffixes).



The CD4098B is similar to type MC14528.

### Features:

- Retriggerable/resettable capability
- Trigger and reset propagation delays independent of  $R_X$ ,  $C_X$
- Triggering from leading or trailing edge
- Q and  $\bar{Q}$  buffered outputs available
- Separate resets
- Wide range of output-pulse widths
- 100% tested for maximum quiescent current at 20 V
- Maximum input current of 1  $\mu A$  at 18 V over full package-temperature range; 100 nA at 18 V and  $25^\circ C$
- Noise margin (full package-temperature range):
  - 1 V at  $V_{DD} = 5$  V
  - 2 V at  $V_{DD} = 10$  V
  - 2.5 V at  $V_{DD} = 15$  V
- 5-V, 10-V, and 15-V parametric ratings
- Standardized, symmetrical output characteristics
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices."

### Applications:

- Pulse delay and timing
- Pulse shaping
- Astable multivibrator

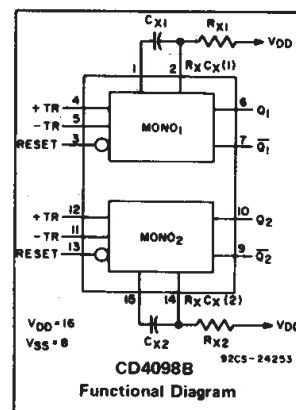

TERMINALS 1, 8, 15 ARE  
ELECTRICALLY CONNECTED  
INTERNALLY

92CS-24648R1

### TERMINAL ASSIGNMENT

### MAXIMUM RATINGS, Absolute-Maximum Values:

|                                                                               |                                                |
|-------------------------------------------------------------------------------|------------------------------------------------|
| DC SUPPLY-VOLTAGE RANGE, ( $V_{DD}$ )                                         | –0.5V to +20V                                  |
| Voltages referenced to $V_{SS}$ Terminal)                                     |                                                |
| INPUT VOLTAGE RANGE, ALL INPUTS                                               | –0.5V to $V_{DD} + 0.5$ V                      |
| DC INPUT CURRENT, ANY ONE INPUT                                               | $\pm 10$ mA                                    |
| POWER DISSIPATION PER PACKAGE ( $P_D$ ):                                      |                                                |
| For $T_A = -55^\circ C$ to $+100^\circ C$                                     | 500 mW                                         |
| For $T_A = +100^\circ C$ to $+125^\circ C$                                    | Derate Linearly at 12 mW/ $^\circ C$ to 200 mW |
| DEVICE DISSIPATION PER OUTPUT TRANSISTOR                                      |                                                |
| For $T_A =$ FULL PACKAGE-TEMPERATURE RANGE (All Package Types)                | 100 mW                                         |
| OPERATING-TEMPERATURE RANGE ( $T_A$ )                                         | $-55^\circ C$ to $+125^\circ C$                |
| STORAGE TEMPERATURE RANGE ( $T_{stg}$ )                                       | $-65^\circ C$ to $+150^\circ C$                |
| LEAD TEMPERATURE (DURING SOLDERING):                                          |                                                |
| At distance $1/16 \pm 1/32$ inch ( $1.59 \pm 0.79$ mm) from case for 10 s max | $+265^\circ C$                                 |

### RECOMMENDED OPERATING CONDITIONS

For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

| CHARACTERISTIC                                                    | $V_{DD}$<br>V | LIMITS                                       |             | UNITS   |
|-------------------------------------------------------------------|---------------|----------------------------------------------|-------------|---------|
|                                                                   |               | MIN.                                         | MAX.        |         |
| Supply-Voltage Range (For $T_A =$ Full Package-Temperature Range) | –             | 3                                            | 18          | V       |
| Trigger Pulse Width $t_W(Tr)$                                     | 5<br>10<br>15 | 140<br>60<br>40                              | –<br>–<br>– | ns      |
| Reset Pulse Width $t_W(R)$<br>(This is a function of $C_X$ )      | –             | See<br>Dynamic Char.<br>Chart and<br>Fig. 10 |             | –       |
| Trigger Rise or Fall Time<br>$t_r(Tr)$ , $t_f(Tr)$                | 5–15          | –                                            | 100         | $\mu s$ |

# CD4098B Types

TABLE I

CD4098B FUNCTIONAL TERMINAL CONNECTIONS

| FUNCTION                                | V <sub>DD</sub> TO TERM. NO. |                   | V <sub>SS</sub> TO TERM. NO. |                   | INPUT PULSE TO TERM. NO. |                   | OTHER CONNECTIONS |                   |
|-----------------------------------------|------------------------------|-------------------|------------------------------|-------------------|--------------------------|-------------------|-------------------|-------------------|
|                                         | MONO <sub>1</sub>            | MONO <sub>2</sub> | MONO <sub>1</sub>            | MONO <sub>2</sub> | MONO <sub>1</sub>        | MONO <sub>2</sub> | MONO <sub>1</sub> | MONO <sub>2</sub> |
| Leading-Edge Trigger/Retriggerable      | 3, 5                         | 11, 13            |                              |                   | 4                        | 12                |                   |                   |
| Leading-Edge Trigger/Non-retriggerable  | 3                            | 13                |                              |                   | 4                        | 12                | 5-7               | 11-9              |
| Trailing-Edge Trigger/Retriggerable     | 3                            | 13                | 4                            | 12                | 5                        | 11                |                   |                   |
| Trailing-Edge Trigger/Non-retriggerable | 3                            | 13                |                              |                   | 5                        | 11                | 4-6               | 12-10             |
| Unused Section                          | 5                            | 11                | 3, 4                         | 12, 13            |                          |                   |                   |                   |

NOTES:

1. A RETRIGGERABLE ONE-SHOT MULTIVIBRATOR HAS AN OUTPUT PULSE WIDTH WHICH IS EXTENDED ONE FULL TIME PERIOD ( $T_X$ ) AFTER APPLICATION OF THE LAST TRIGGER PULSE. The minimum time between retriggering edges (or trigger and retrigger edges) is 40 per cent of ( $T_X$ ).

2. A NON-RETRIGGERABLE ONE-SHOT MULTIVIBRATOR HAS A TIME PERIOD  $T_X$  REFERENCED FROM THE APPLICATION OF THE FIRST TRIGGER PULSE.

INPUT PULSE TRAIN

RETRIGGERABLE MODE PULSE WIDTH (+TR MODE)

NON-RETRIGGERABLE MODE PULSE WIDTH (+TR MODE)

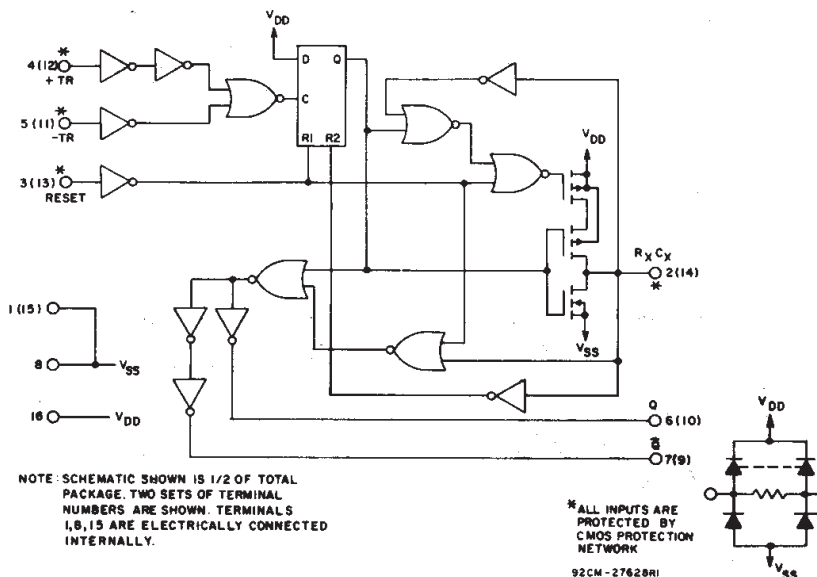


Fig. 4 — CD4098B logic diagram.

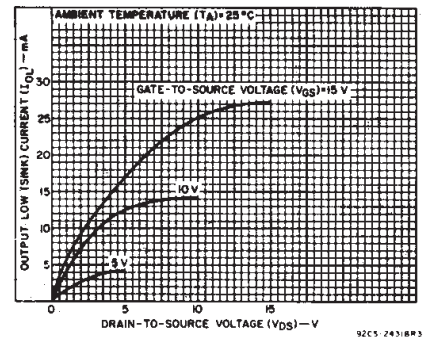


Fig. 1 — Typical output low (sink) current characteristics.

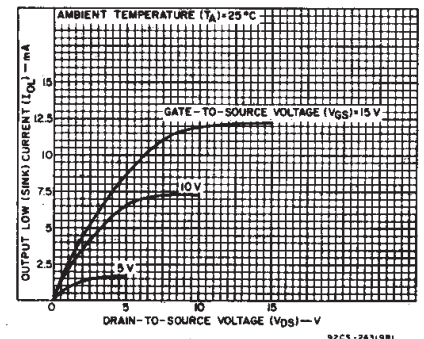


Fig. 2 — Minimum output low (sink) current characteristics.

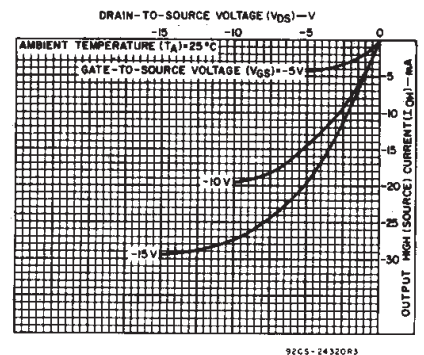


Fig. 3 — Typical output high (source) current characteristics.

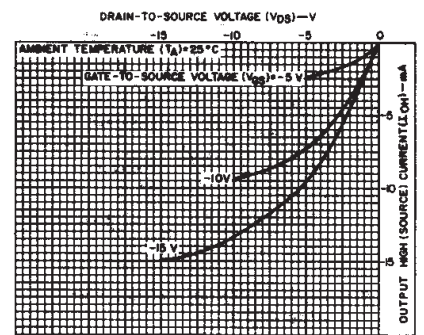


Fig. 5 — Minimum output high (source) current characteristics.

3

COMMERCIAL CMOS  
HIGH VOLTAGE ICs

# CD4098B Types

## STATIC ELECTRICAL CHARACTERISTICS

| CHARACTERISTIC                                     | CONDITIONS            |                        |                        | LIMITS AT INDICATED TEMPERATURES (°C) |       |       |       |       |                   |      | UNITS |
|----------------------------------------------------|-----------------------|------------------------|------------------------|---------------------------------------|-------|-------|-------|-------|-------------------|------|-------|
|                                                    | V <sub>O</sub><br>(V) | V <sub>IN</sub><br>(V) | V <sub>DD</sub><br>(V) | -55                                   | -40   | +85   | +125  | +25   |                   |      |       |
|                                                    |                       |                        |                        |                                       |       |       |       | Min.  | Typ.              | Max. |       |
| Quiescent Device Current, I <sub>DD</sub> Max.     | —                     | 0.5                    | 5                      | 1                                     | 1     | 30    | 30    | —     | 0.02              | 1    | μA    |
|                                                    | —                     | 0.10                   | 10                     | 2                                     | 2     | 60    | 60    | —     | 0.02              | 2    |       |
|                                                    | —                     | 0.15                   | 15                     | 4                                     | 4     | 120   | 120   | —     | 0.02              | 4    |       |
|                                                    | —                     | 0.20                   | 20                     | 20                                    | 20    | 600   | 600   | —     | 0.04              | 20   |       |
| Output Low (Sink) Current, I <sub>OL</sub> Min.    | 0.4                   | 0.5                    | 5                      | 0.64                                  | 0.61  | 0.42  | 0.36  | 0.51  | 1                 | —    | mA    |
|                                                    | 0.5                   | 0.10                   | 10                     | 1.6                                   | 1.5   | 1.1   | 0.9   | 1.3   | 2.6               | —    |       |
|                                                    | 1.5                   | 0.15                   | 15                     | 4.2                                   | 4     | 2.8   | 2.4   | 3.4   | 6.8               | —    |       |
|                                                    | 1.5                   | 0.15                   | 15                     | 4.2                                   | 4     | 2.8   | 2.4   | 3.4   | 6.8               | —    |       |
| Output High (Source) Current, I <sub>OH</sub> Min. | 4.6                   | 0.5                    | 5                      | -0.64                                 | -0.61 | -0.42 | -0.36 | -0.51 | -1                | —    | mA    |
|                                                    | 2.5                   | 0.5                    | 5                      | -2                                    | -1.8  | -1.3  | -1.15 | -1.6  | -3.2              | —    |       |
|                                                    | 9.5                   | 0.10                   | 10                     | -1.6                                  | -1.5  | -1.1  | -0.9  | -1.3  | -2.6              | —    |       |
|                                                    | 13.5                  | 0.15                   | 15                     | -4.2                                  | -4    | -2.8  | -2.4  | -3.4  | -6.8              | —    |       |
| Output Voltage: Low-Level, V <sub>OL</sub> Max.    | —                     | 0.5                    | 5                      | 0.05                                  |       |       |       | —     | 0                 | 0.05 | V     |
|                                                    | —                     | 0.10                   | 10                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |
|                                                    | —                     | 0.15                   | 15                     | 0.05                                  |       |       |       | —     | 0                 | 0.05 |       |
|                                                    | —                     | 0.5                    | 5                      | 4.95                                  |       |       |       | 4.95  | 5                 | —    |       |
| Output Voltage: High-Level, V <sub>OH</sub> Min.   | —                     | 0.10                   | 10                     | 9.95                                  |       |       |       | 9.95  | 10                | —    | V     |
|                                                    | —                     | 0.15                   | 15                     | 14.95                                 |       |       |       | 14.95 | 15                | —    |       |
|                                                    | 0.5, 4.5              | —                      | 5                      | 1.5                                   |       |       |       | —     | —                 | 1.5  |       |
|                                                    | 1.9                   | —                      | 10                     | 3                                     |       |       |       | —     | —                 | 3    |       |
| Input Low Voltage, V <sub>IL</sub> Max.            | 1.5, 13.5             | —                      | 15                     | 4                                     |       |       |       | —     | —                 | 4    | V     |
|                                                    | 0.5, 4.5              | —                      | 5                      | 3.5                                   |       |       |       | 3.5   | —                 | —    |       |
|                                                    | 1.9                   | —                      | 10                     | 7                                     |       |       |       | 7     | —                 | —    |       |
|                                                    | 1.5, 13.5             | —                      | 15                     | 11                                    |       |       |       | 11    | —                 | —    |       |
| Input Current, I <sub>IN</sub> Max.                | —                     | 0.18                   | 18                     | ±0.1                                  | ±0.1  | ±1    | ±1    | —     | ±10 <sup>-5</sup> | ±0.1 | μA    |

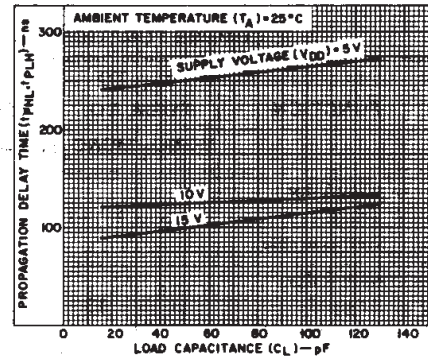


Fig. 6 – Typical propagation delay time vs. load capacitance, trigger into Q out. (All values of  $C_X$  and  $R_X$ .)

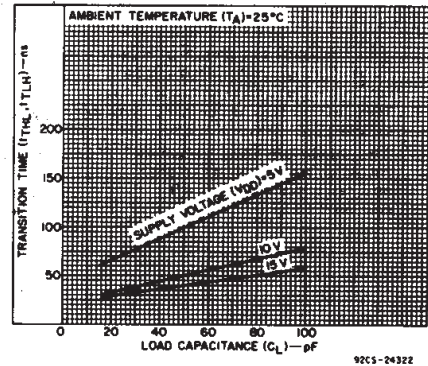


Fig. 7 – Transition time vs. load capacitance for  $R_X = 5\text{ k}\Omega$ -10000  $\text{k}\Omega$  and  $C_X = 15\text{ pF}$ -10000  $\text{pF}$ .

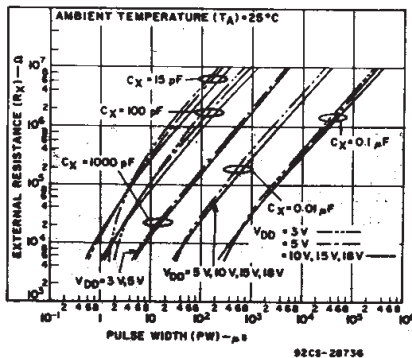


Fig. 8 – Typical external resistance vs. pulse width.

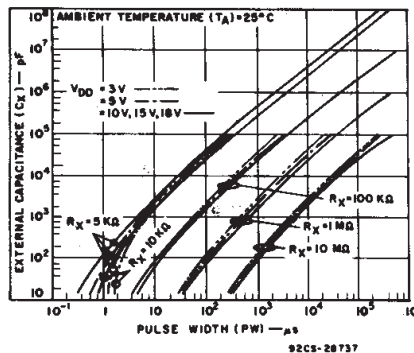


Fig. 9 – Typical external capacitance vs. pulse width.

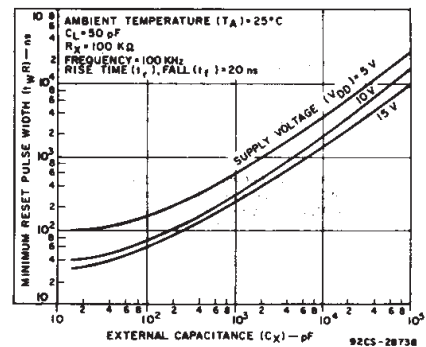


Fig. 10 – Typical minimum reset pulse width vs. external capacitance.

# CD4098B Types

## DYNAMIC ELECTRICAL CHARACTERISTICS

At  $T_A = 25^\circ\text{C}$ ; Input  $t_r, t_f = 20\text{ ns}$ ,  $C_L = 50\text{ pF}$ ,  $R_L = 200\text{ k}\Omega$

| CHARACTERISTIC                                                                      | TEST CONDITIONS     |                                         |               | LIMITS            |                    | UNITS         |
|-------------------------------------------------------------------------------------|---------------------|-----------------------------------------|---------------|-------------------|--------------------|---------------|
|                                                                                     | $R_X$ (k $\Omega$ ) | $C_X$ (pF)                              | $V_{DD}$ (V)  | Typ.              | Max.               |               |
| Trigger Propagation Delay Time<br>+TR, -TR to Q, $\bar{Q}$<br>$t_{PHL}$ , $t_{PLH}$ | 5 to 10,000         | $\geq 15$                               | 5<br>10<br>15 | 250<br>125<br>100 | 500<br>250<br>200  | ns            |
| Minimum Trigger Pulse Width,<br>$t_{WH}$ , $t_{WL}$                                 | 5 to 10,000         | $\geq 15$                               | 5<br>10<br>15 | 70<br>30<br>20    | 140<br>60<br>40    | ns            |
| Transition Time,<br>$t_{TLH}$                                                       | 5 to 10,000         | $\geq 15$                               | 5<br>10<br>15 | 100<br>50<br>40   | 200<br>100<br>80   | ns            |
| $t_{THL}$                                                                           | 5 to 10,000         | 15 to 10,000                            | 5<br>10<br>15 | 100<br>50<br>40   | 200<br>100<br>80   |               |
|                                                                                     | 5 to 10,000         | 0.01 $\mu\text{F}$ to 0.1 $\mu\text{F}$ | 5<br>10<br>15 | 150<br>75<br>65   | 300<br>150<br>130  |               |
|                                                                                     | 5 to 10,000         | 0.1 $\mu\text{F}$ to 1 $\mu\text{F}$    | 5<br>10<br>15 | 250<br>150<br>80  | 500<br>300<br>160  |               |
| Reset Propagation Delay Time,<br>$T_{PHL}$ , $T_{PLH}$                              | 5 to 10,000         | $\geq 15$                               | 5<br>10<br>15 | 225<br>125<br>75  | 450<br>250<br>150  | ns            |
| Minimum Reset Pulse Width,<br>$t_{WR}$                                              | 100                 | 15                                      | 5<br>10<br>15 | 100<br>40<br>30   | 200<br>80<br>60    | ns            |
|                                                                                     |                     |                                         | 5<br>10<br>15 | 600<br>300<br>250 | 1200<br>600<br>500 |               |
|                                                                                     |                     | 0.1 $\mu\text{F}$                       | 5<br>10<br>15 | 25<br>15<br>10    | 50<br>30<br>20     | $\mu\text{s}$ |
|                                                                                     |                     |                                         | 5<br>10<br>15 | 5<br>7.5<br>7.5   | 10<br>15<br>15     |               |
| Trigger Rise or Fall Time<br>$t_r$ (TR), $t_f$ (TR)                                 | —                   | —                                       | 5 to 15       | —                 | 100                | $\mu\text{s}$ |
| Pulse Width Match<br>Between Circuits in<br>Same Package                            | 10                  | 10,000                                  | 5<br>10<br>15 | 5<br>7.5<br>7.5   | 10<br>15<br>15     | %             |
| Input Capacitance, $C_{IN}$                                                         | Any Input           |                                         |               | 5                 | 7.5                | pF            |

## TEST CIRCUITS




Fig. 12 - Quiescent-device-current test circuits.

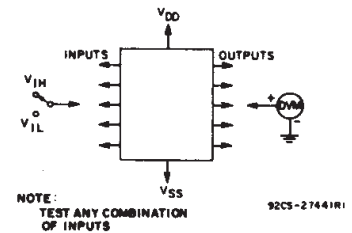


Fig. 13 - Input-voltage test circuit.

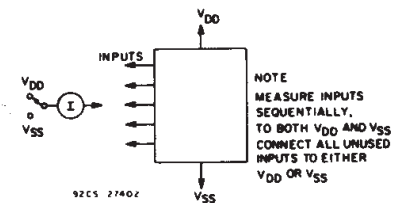


Fig. 14 - Input leakage current test circuit.


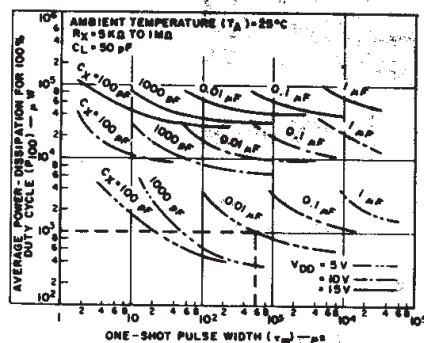


Fig. 11 - Average power dissipation vs. one-shot pulse width.

To calculate average power dissipation (P) for less than 100% duty cycle:  
 $P_{100}$  = average power for 100% duty cycle  
 $P = \left( \frac{t_m}{T} \right) P_{100}$  where  $t_m$  = one-shot pulse width  
 $T$  = trigger pulse period  
 e.g. For  $t_m = 600\text{ }\mu\text{s}$ ,  $T = 1000\text{ }\mu\text{s}$ ,  $C_X = 0.01\text{ }\mu\text{F}$ ,  
 $V_{DD} = 5\text{ V}$   
 $P = \left( \frac{600}{1000} \right) 10^{-3} \mu\text{W} = 600\text{ }\mu\text{W}$  (see dotted line on graph)



92CN-28739

## APPLICATIONS



Copyright © 2004, Texas Instruments Incorporated

**PACKAGING INFORMATION**

| Orderable Device | Status <sup>(1)</sup> | Package Type | Package Drawing | Pins | Package Qty | Eco Plan <sup>(2)</sup> | Lead/Ball Finish | MSL Peak Temp <sup>(3)</sup> |
|------------------|-----------------------|--------------|-----------------|------|-------------|-------------------------|------------------|------------------------------|
| CD4098BE         | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| CD4098BEE4       | ACTIVE                | PDIP         | N               | 16   | 25          | Pb-Free (RoHS)          | CU NIPDAU        | N / A for Pkg Type           |
| CD4098BF         | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| CD4098BF3A       | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| CD4098BFB        | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |
| CD4098BM         | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BM96       | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BM96E4     | ACTIVE                | SOIC         | D               | 16   | 2500        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BME4       | ACTIVE                | SOIC         | D               | 16   | 40          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BMT        | ACTIVE                | SOIC         | D               | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BMTE4      | ACTIVE                | SOIC         | D               | 16   | 250         | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BPW        | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BPWE4      | ACTIVE                | TSSOP        | PW              | 16   | 90          | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BPWR       | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| CD4098BPWRE4     | ACTIVE                | TSSOP        | PW              | 16   | 2000        | Green (RoHS & no Sb/Br) | CU NIPDAU        | Level-1-260C-UNLIM           |
| JM38510/17504BEA | ACTIVE                | CDIP         | J               | 16   | 1           | TBD                     | A42 SNPB         | N / A for Pkg Type           |

<sup>(1)</sup> The marketing status values are defined as follows:

**ACTIVE:** Product device recommended for new designs.

**LIFEBUY:** TI has announced that the device will be discontinued, and a lifetime-buy period is in effect.

**NRND:** Not recommended for new designs. Device is in production to support existing customers, but TI does not recommend using this part in a new design.

**PREVIEW:** Device has been announced but is not in production. Samples may or may not be available.

**OBSOLETE:** TI has discontinued the production of the device.

<sup>(2)</sup> Eco Plan - The planned eco-friendly classification: Pb-Free (RoHS), Pb-Free (RoHS Exempt), or Green (RoHS & no Sb/Br) - please check <http://www.ti.com/productcontent> for the latest availability information and additional product content details.

**TBD:** The Pb-Free/Green conversion plan has not been defined.

**Pb-Free (RoHS):** TI's terms "Lead-Free" or "Pb-Free" mean semiconductor products that are compatible with the current RoHS requirements for all 6 substances, including the requirement that lead not exceed 0.1% by weight in homogeneous materials. Where designed to be soldered at high temperatures, TI Pb-Free products are suitable for use in specified lead-free processes.

**Pb-Free (RoHS Exempt):** This component has a RoHS exemption for either 1) lead-based flip-chip solder bumps used between the die and package, or 2) lead-based die adhesive used between the die and leadframe. The component is otherwise considered Pb-Free (RoHS compatible) as defined above.

**Green (RoHS & no Sb/Br):** TI defines "Green" to mean Pb-Free (RoHS compatible), and free of Bromine (Br) and Antimony (Sb) based flame retardants (Br or Sb do not exceed 0.1% by weight in homogeneous material)

<sup>(3)</sup> MSL, Peak Temp. -- The Moisture Sensitivity Level rating according to the JEDEC industry standard classifications, and peak solder temperature.

**Important Information and Disclaimer:** The information provided on this page represents TI's knowledge and belief as of the date that it is provided. TI bases its knowledge and belief on information provided by third parties, and makes no representation or warranty as to the accuracy of such information. Efforts are underway to better integrate information from third parties. TI has taken and continues to take reasonable steps to provide representative and accurate information but may not have conducted destructive testing or chemical analysis on incoming materials and chemicals. TI and TI suppliers consider certain information to be proprietary, and thus CAS numbers and other limited information may not be available for release.

In no event shall TI's liability arising out of such information exceed the total purchase price of the TI part(s) at issue in this document sold by TI to Customer on an annual basis.

J (R-GDIP-T\*\*)

14 LEADS SHOWN

# CERAMIC DUAL IN-LINE PACKAGE



| PINS **<br>DIM | 14                     | 16                     | 18                     | 20                     |
|----------------|------------------------|------------------------|------------------------|------------------------|
| A              | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC | 0.300<br>(7,62)<br>BSC |
| B MAX          | 0.785<br>(19,94)       | .840<br>(21,34)        | 0.960<br>(24,38)       | 1.060<br>(26,92)       |
| B MIN          | —                      | —                      | —                      | —                      |
| C MAX          | 0.300<br>(7,62)        | 0.300<br>(7,62)        | 0.310<br>(7,87)        | 0.300<br>(7,62)        |
| C MIN          | 0.245<br>(6,22)        | 0.245<br>(6,22)        | 0.220<br>(5,59)        | 0.245<br>(6,22)        |



4040083/F 03/03

- NOTES:
- A. All linear dimensions are in inches (millimeters).
  - B. This drawing is subject to change without notice.
  - C. This package is hermetically sealed with a ceramic lid using glass frit.
  - D. Index point is provided on cap for terminal identification only on press ceramic glass frit seal only.
  - E. Falls within MIL STD 1835 GDIP1-T14, GDIP1-T16, GDIP1-T18 and GDIP1-T20.

N (R-PDIP-T\*\*)

16 PINS SHOWN

## PLASTIC DUAL-IN-LINE PACKAGE



| PINS **<br>DIM      | 14               | 16               | 18               | 20               |
|---------------------|------------------|------------------|------------------|------------------|
| A MAX               | 0.775<br>(19,69) | 0.775<br>(19,69) | 0.920<br>(23,37) | 1.060<br>(26,92) |
| A MIN               | 0.745<br>(18,92) | 0.745<br>(18,92) | 0.850<br>(21,59) | 0.940<br>(23,88) |
| MS-001<br>VARIATION | AA               | BB               | AC               | AD               |



4040049/E 12/2002

NOTES:

- A. All linear dimensions are in inches (millimeters).  
B. This drawing is subject to change without notice.
-  Falls within JEDEC MS-001, except 18 and 20 pin minimum body length (Dim A).  
 The 20 pin end lead shoulder width is a vendor option, either half or full width.

## D (R-PDSO-G16)

## PLASTIC SMALL-OUTLINE PACKAGE



- NOTES:
- All linear dimensions are in inches (millimeters).
  - This drawing is subject to change without notice.
  - Body dimensions do not include mold flash or protrusion not to exceed 0.006 (0,15).
  - Falls within JEDEC MS-012 variation AC.

## PW (R-PDSO-G\*\*)

## PLASTIC SMALL-OUTLINE PACKAGE

14 PINS SHOWN



- NOTES: A. All linear dimensions are in millimeters.  
 B. This drawing is subject to change without notice.  
 C. Body dimensions do not include mold flash or protrusion not to exceed 0,15.  
 D. Falls within JEDEC MO-153

## IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third-party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Following are URLs where you can obtain information on other Texas Instruments products and application solutions:

| <b>Products</b>    |                                                                    | <b>Applications</b> |                                                                          |
|--------------------|--------------------------------------------------------------------|---------------------|--------------------------------------------------------------------------|
| Amplifiers         | <a href="http://amplifier.ti.com">amplifier.ti.com</a>             | Audio               | <a href="http://www.ti.com/audio">www.ti.com/audio</a>                   |
| Data Converters    | <a href="http://dataconverter.ti.com">dataconverter.ti.com</a>     | Automotive          | <a href="http://www.ti.com/automotive">www.ti.com/automotive</a>         |
| DSP                | <a href="http://dsp.ti.com">dsp.ti.com</a>                         | Broadband           | <a href="http://www.ti.com/broadband">www.ti.com/broadband</a>           |
| Interface          | <a href="http://interface.ti.com">interface.ti.com</a>             | Digital Control     | <a href="http://www.ti.com/digitalcontrol">www.ti.com/digitalcontrol</a> |
| Logic              | <a href="http://logic.ti.com">logic.ti.com</a>                     | Military            | <a href="http://www.ti.com/military">www.ti.com/military</a>             |
| Power Mgmt         | <a href="http://power.ti.com">power.ti.com</a>                     | Optical Networking  | <a href="http://www.ti.com/opticalnetwork">www.ti.com/opticalnetwork</a> |
| Microcontrollers   | <a href="http://microcontroller.ti.com">microcontroller.ti.com</a> | Security            | <a href="http://www.ti.com/security">www.ti.com/security</a>             |
| Low Power Wireless | <a href="http://www.ti.com/lpw">www.ti.com/lpw</a>                 | Telephony           | <a href="http://www.ti.com/telephony">www.ti.com/telephony</a>           |
|                    |                                                                    | Video & Imaging     | <a href="http://www.ti.com/video">www.ti.com/video</a>                   |
|                    |                                                                    | Wireless            | <a href="http://www.ti.com/wireless">www.ti.com/wireless</a>             |

Mailing Address: Texas Instruments  
Post Office Box 655303 Dallas, Texas 75265

Copyright © 2006, Texas Instruments Incorporated