

Distributed by:



www.Jameco.com ♦ 1-800-831-4242



The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1964590

MATERIAL NUMBER	ENGINEERING NUMBER	TAPE MATERIAL NUMBER	TAPE ENGINEERING NUMBER	WIRE SIZE AWG	WIRE SIZE MM SQ.	FITS MALE TAB	PERMA-SEAL COLOR	A MAX.	D MWID	E MIN	F MAX. DIA.	H ±.010/.025
191640017	SAA-9261	191640018	SAA-9261T	22-18	.25-1.5	.250 X .032	RED	1.63/41.4	.17/4.3	.083/2.11	.286/7.26	.55/14.0
191640050	SBB-9263	191640051	SBB-9263T	16-14	1.0-2.5	.250 X .032	BLUE	1.46/37.1	.17/4.3	.083/2.11	.298/7.57	.55/14.0
191640076	SC-9281	191640305	SC-9281T	12-10	4.0-6.0	.250 X .032	YELLOW	1.52/38.6	.23/5.8	.140/3.56	.373/9.47	.56/14.2

(C)

(C)

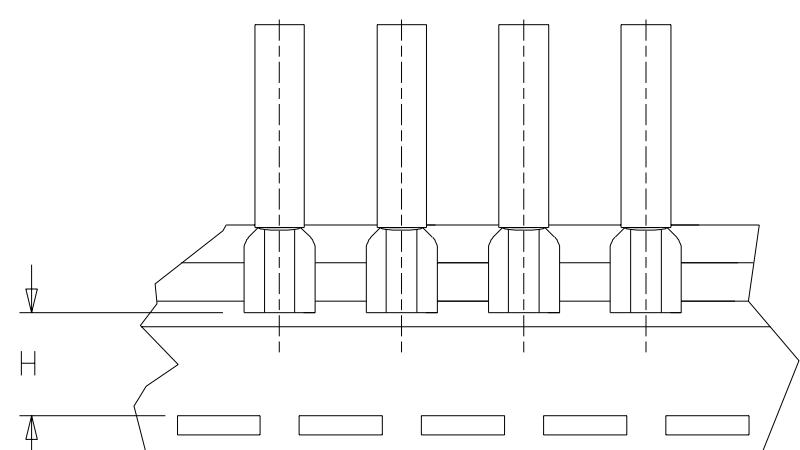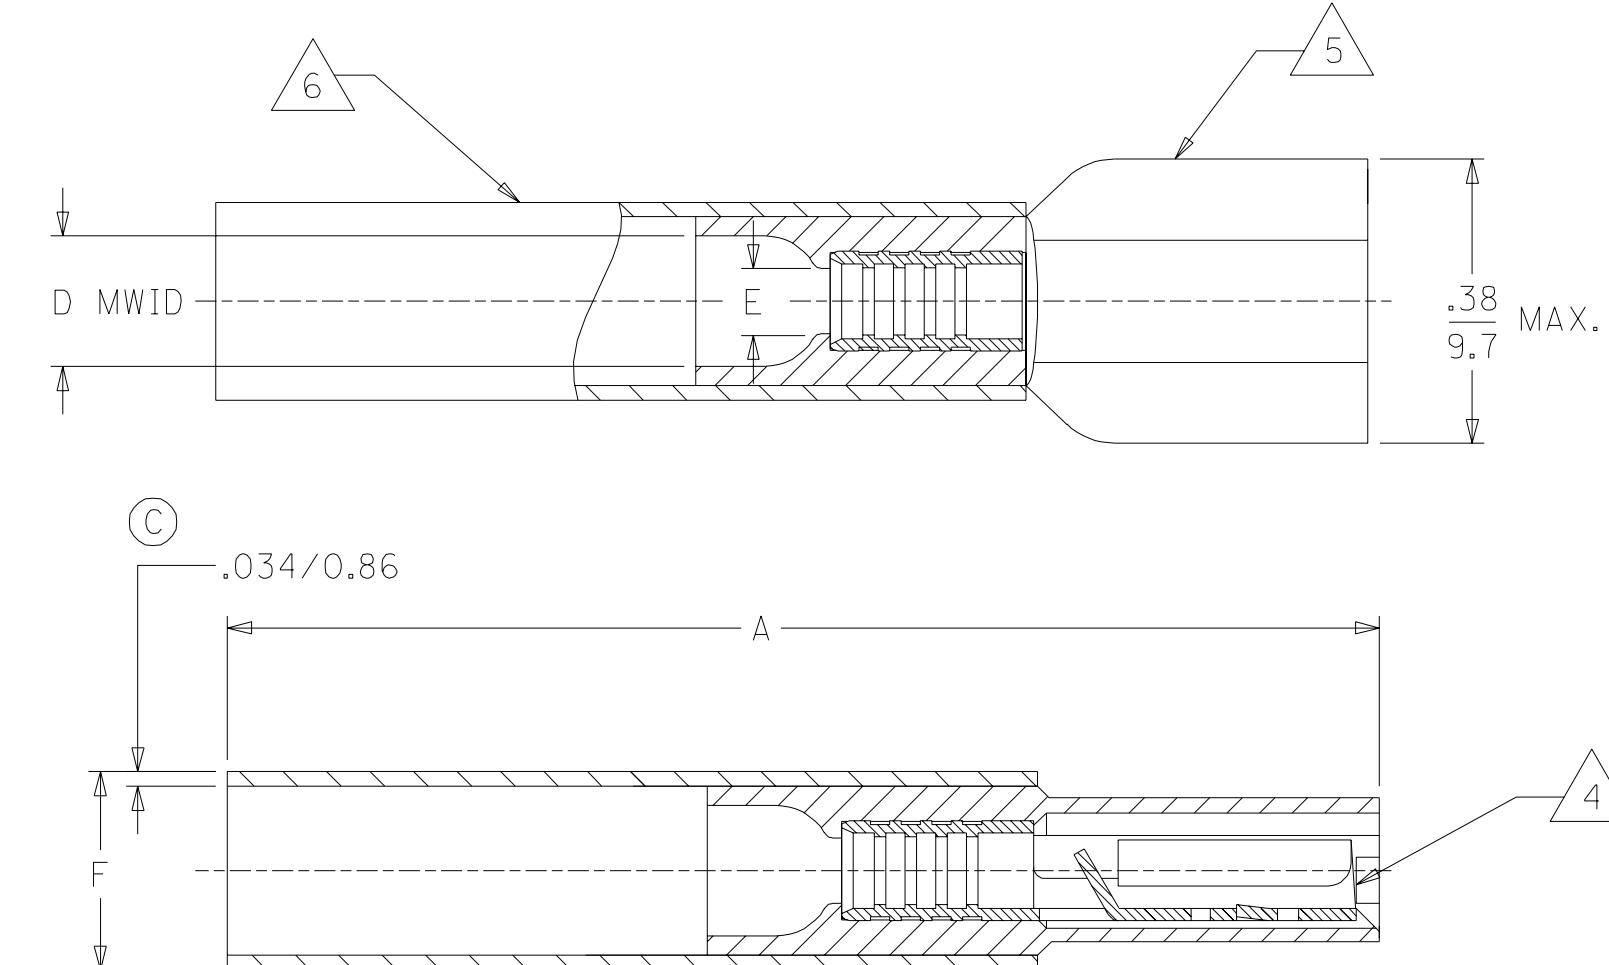

TAPE MOUNTING DETAIL

NOTES:

1. FEMALE RECEPTACLE CONFORMS TO NEMA.
2. ALL DIMENSIONS SHOWN ARE BEFORE SHRINK TUBING IS HEATED.
3. "MWID" DENOTES MAX. WIRE INSULATION DIA.
4. TAB MATERIAL: .018 THK, BRASS, PLATING, TIN.
5. INSULATION MAT'L: MOLDED NYLON
6. NIAC TUBING WITH HOTMELT INNER LINER. SEE CHART FOR COLOR.

SALES DRAWING

GENERAL TOLERANCES: (UNLESS SPECIFIED)										SCALE NO:NE	DESIGN UNITS mm INCH	THIRD ANGLE PROJECTION	DIMENSIONS: mm INCH mm ONLY		SHT REV
4 PLACES	±0.	±.	BRE	02/10/29											REVISE ON CAD ONLY
3 PLACES	±0.	±.005	HEB	02/10/29											
2 PLACES	±0.13	±.01													
1 PLACE	±0.25	±.	RWD	02/10/29											
ANGULAR: ±1/2°										CAD FILENAME					
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS										SD-19164-020.DGN					
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.															

WAS CD05335-03	EC NO. ETC2003-0102	03/03/20	DRWN:BRE	03/03/20	CHK: HEB	03/03/20	APPR:RWD	DESCRIPTION	QUALITY SYMBOLS	MAJOR C=0	CRITICAL C=0	REV

TITLE: PERMA-SEAL COUPLER
FEMALE RECEPTACLE
NIAC

MOLEX INCORPORATED

MATERIAL NO. SEE CHART DRAWING NO. SD-19164-020 SHEET NO. 1 OF 1
SIZE B