







Distributed by:

JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 1973162

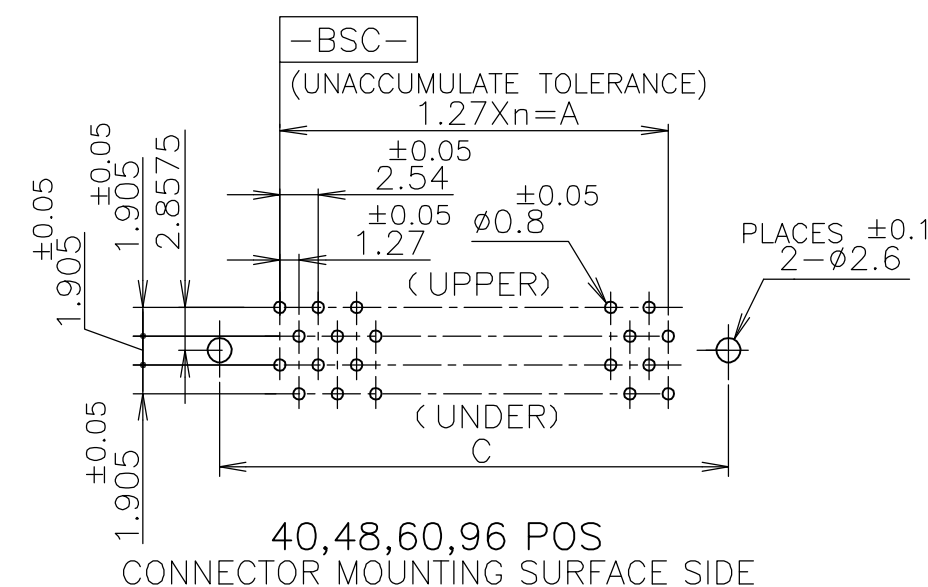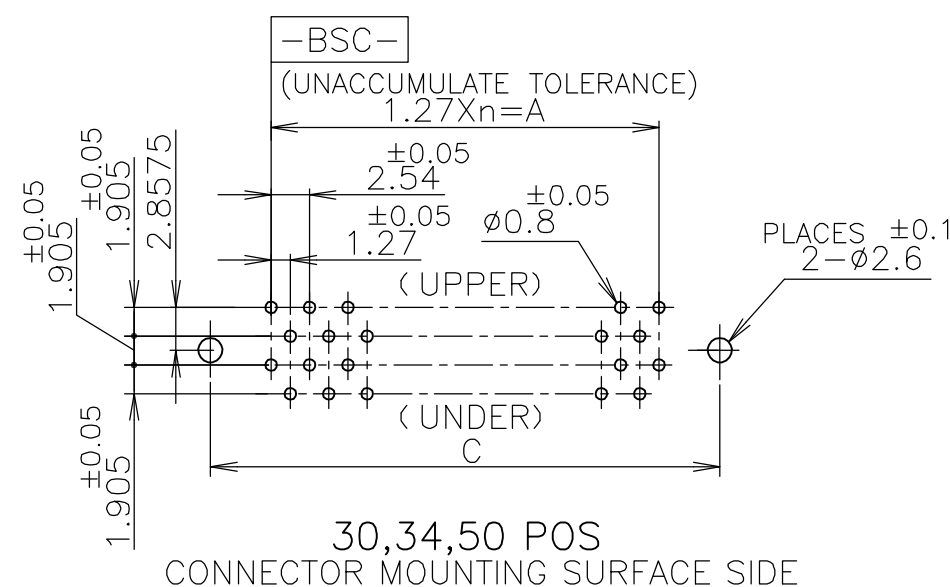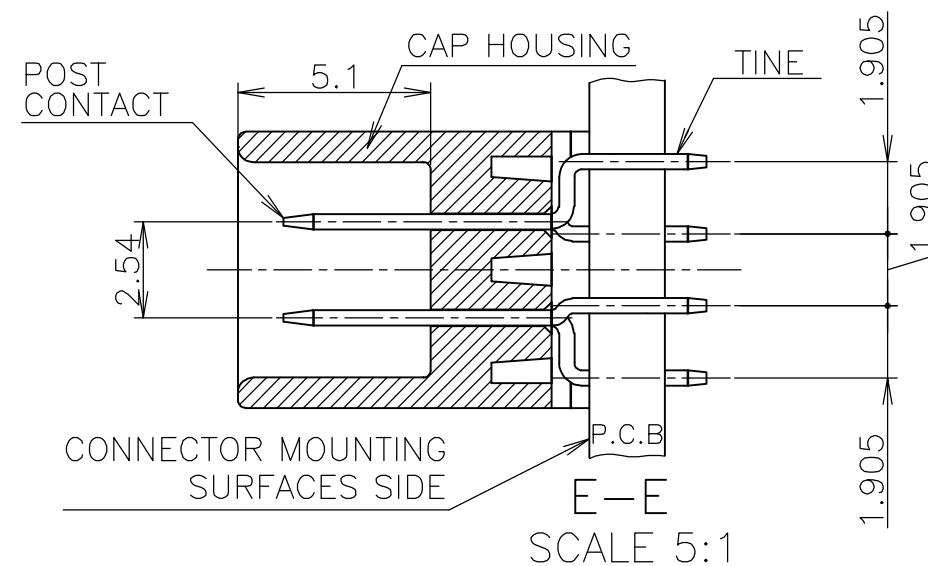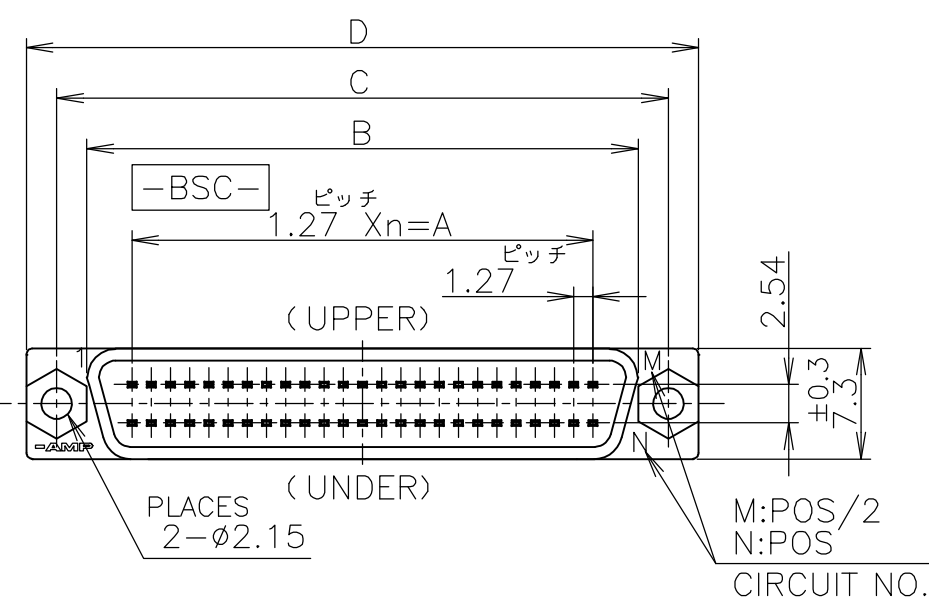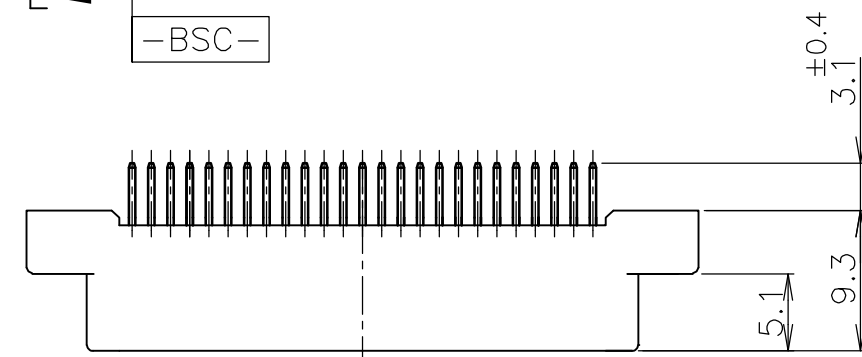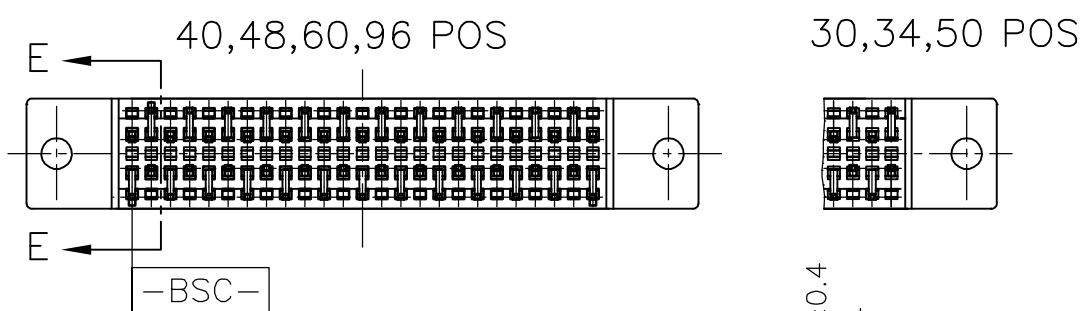

- 1 USE A P.C.B. WHOSE SURFACES ARE TREATED WITH SOLDER RESIST.
- 2 SHOW P.C.B LAYOUT FROM THE CONNECTOR-MOUNTING SURFACE SIDE.
- 3 NUMBER THE CONTACTS IN THE P.C.B OR CONNECTOR CONSECUTIVELY FROM THE -BSC- SIDE.
- 4 WHEN SCREWING THE CONNECTOR TO THE P.C.B, USE M2 SCREW, NUT AND WASHERS.
- 5 △ HOUSING MATERIAL : THERMOPLASTICS (UL94-V0). COLOR:BLACK
- 6 △ CONTACT MATERIAL : COPPER ALLOY
- 7 △ FINISH : NICKEL 1.27 μ MIN THK. OVERALL SELECTIVE GOLD 0.2 μ MIN THK ON CONTACT AREA AND TIN 1 μ MIN THK ON TINE AREA.

	↑ -8	96	47	59.69	65.66	69.66	73.66
	-6	48	23	29.21	35.18	39.18	43.18
	-5	34	16	20.32	26.29	30.29	34.29
	-4	60	29	36.83	42.80	46.80	50.80
	-3	50	24	30.48	36.45	40.45	44.45
	-2	40	19	24.13	30.10	34.10	38.10
5173280-1		30	14	17.78	23.75	27.75	31.75
P/N	POS	n	A	B	C	D	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.KAWAMAE 01APR05		tyco Electronics		Tyco Electronics AMP K.K. Kawasaki.Japan									
DIMENSIONS: 単位： 耗 MM		TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		CHK I.ENOMOTO 01APR05		NAME 名称 CAP ASSY VERTICAL AMPLIMITE 050 SERIES I B-TO-B CONN. —									
		0 PLC ± — 1 PLC ± — 2 PLC ± — 3 PLC ± — 4 PLC ± — ANGLES ± —		APVD I.ENOMOTO 01APR05											
				PRODUCT SPEC 製品規格 108-60036											
MATERIAL 材料 参照 ⑤ ⑥		FINISH 仕上 参照 ⑦		APPLICATION SPEC 取付適用規格		SIZE		CAGE CODE	DRAWING NO 番号	RESTRICTED					
				WEIGHT		A3		00779		C-5173280		—			
CUSTOMER DRAWING										SCALE 尺度 2:1		SHEET 1 OF 3		REV A	

