

PC 2828 13 G

FIBOX
Enclosing innovations



Sample image

Order symbol : PC 2828 13 G

Product nr : 5330362

UL Code : 5320362

UL Name : UL PC 2828 13 G

Description : Enclosure, PC



Remarks : Grey cover

Including : Base with screws for mounting plate. cover with PUR gasket and polyamide cover screws.

EAN : 6418074005526

El. number :

- Finland : 3423713
- Sweden : 2539418

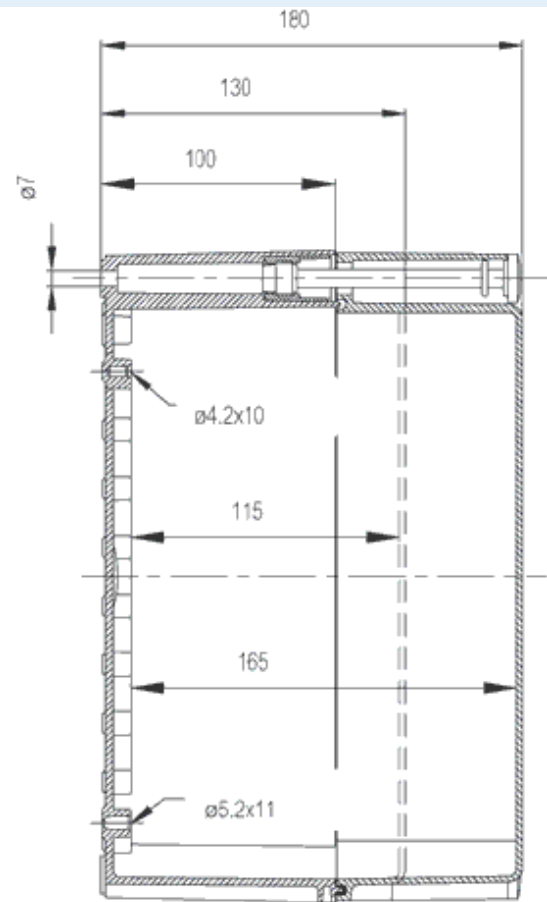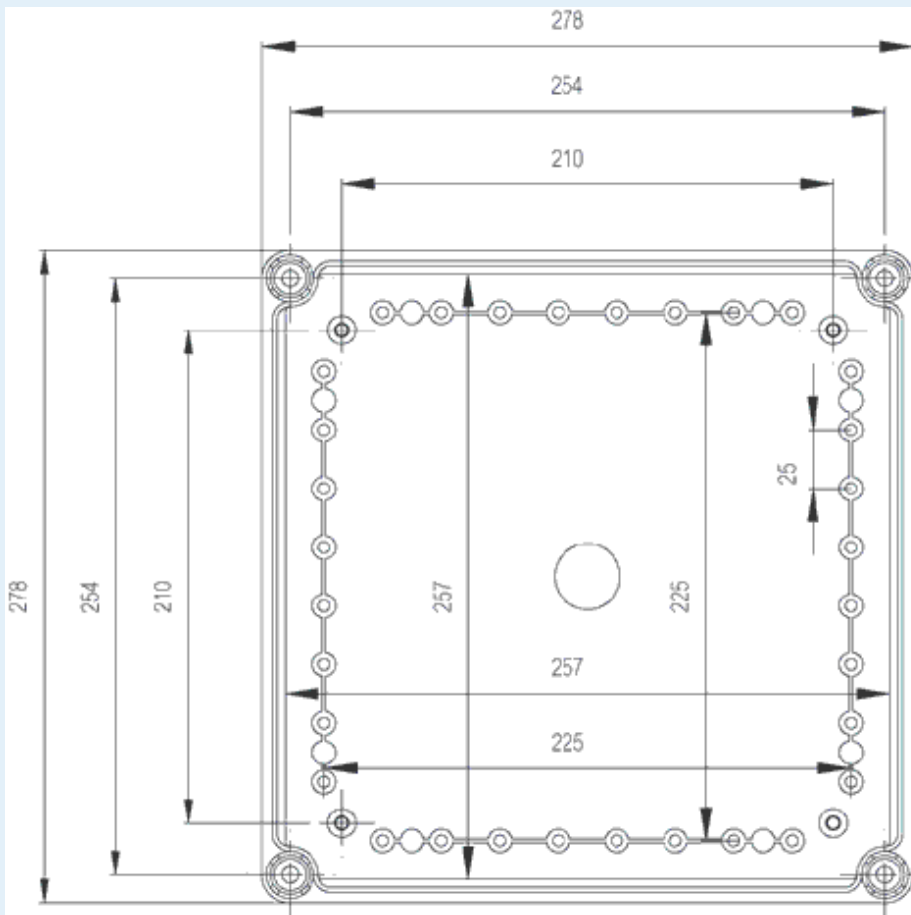

Dimensions :

mm :

Height

280

Width

280

Depth

130

Accessories :

EKOZR

Extension frame, for enclosures:
(280 x 280 x 50)

inch :	11.02	11.02	5.12
Materials :			
Material :	Polycarbonate		
Base colour :	RAL 7035 -light grey		
Cover colour :	RAL 7035 -light grey		
Gasket material :	Polyurethane		
Temperatures :			
Temperature °C (short term) :	-40 ... 120		
Temperature °C (continuous) :	-40 ... 80		
Temperature °F (short term) :	-40 ... 250		
Temperature °F (continuous) :	-40 ... 175		

EKV 22	DIN-35 Mounting rail, for enclosures: (235 x 35 x 1)
EKOVT	Mounting plate, for enclosures: (238 x 238 x 1.5)
MPI EKO 2828	Multiperforated plastic mounting plate (244 x 244 x 4)

Ratings :

Ingress protection (EN 60529):	IP66; IP67;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated
Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C

Certificates :

Certificate NCS FI 30308