

CAB PC 405020 T



Sample image

Order symbol : CAB PC 405020 T

Product nr : 8113061

UL Code : 8143061

UL Name : UL CAB PC 405020 T

Description : Cabinet, PC, Smoked transparent door

Remarks : Latches on the short side


EAN : 6418074020352

El. number :

- Finland : 3424172
- Denmark : 8212020456
- Sweden : 2539953

Including : Cabinet base. door with PUR gasket. latches. screws for mounting plate/ DIN-rail and corner plugs.

CAB 500x400x200

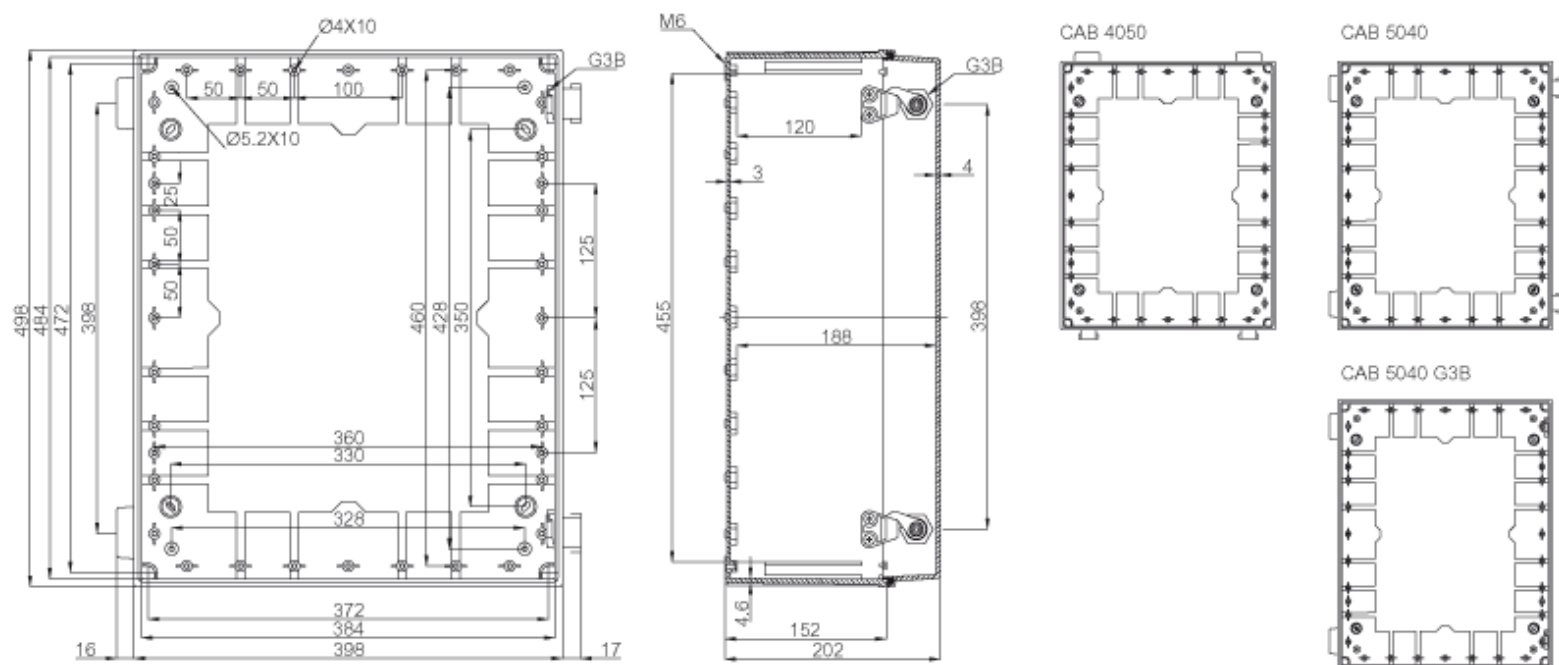

Dimensions :

	Height	Width	Depth
mm :	400	500	200
inch :	15.75	19.69	7.87

Ratings :

Ingress protection (EN 60529):	IP65;
Impact Resistance (EN 62262):	IK08;
electrical_insulation :	Totally insulated

Materials :

Material :	Polycarbonate
Base colour :	RAL 7035 -light grey
Cover colour :	Clear transparent
Gasket material :	Polyurethane

Halogen free (DIN/VDE 0472, Part 815) :	Yes
UV resistance :	UL 508
Flammability Rating :	UL 746C 5"
Glow Wire Test (IEC 695-2-1) °C :	960 °C

Temperatures :

Temperature °C (short term) :	-40 ... 120
Temperature °C (continuous) :	-40 ... 80
Temperature °F (short term) :	-40 ... 250
Temperature °F (continuous) :	-40 ... 175

Certificates :

Certificate FI 40854