

Distributed by:





JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242

The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 851729


LOC	DIST	REVISIONS				
H	—	P	LTR	DESCRIPTION	DATE	DWN
		A		EHCO-0319-04	03AUG04	KNK
						BM

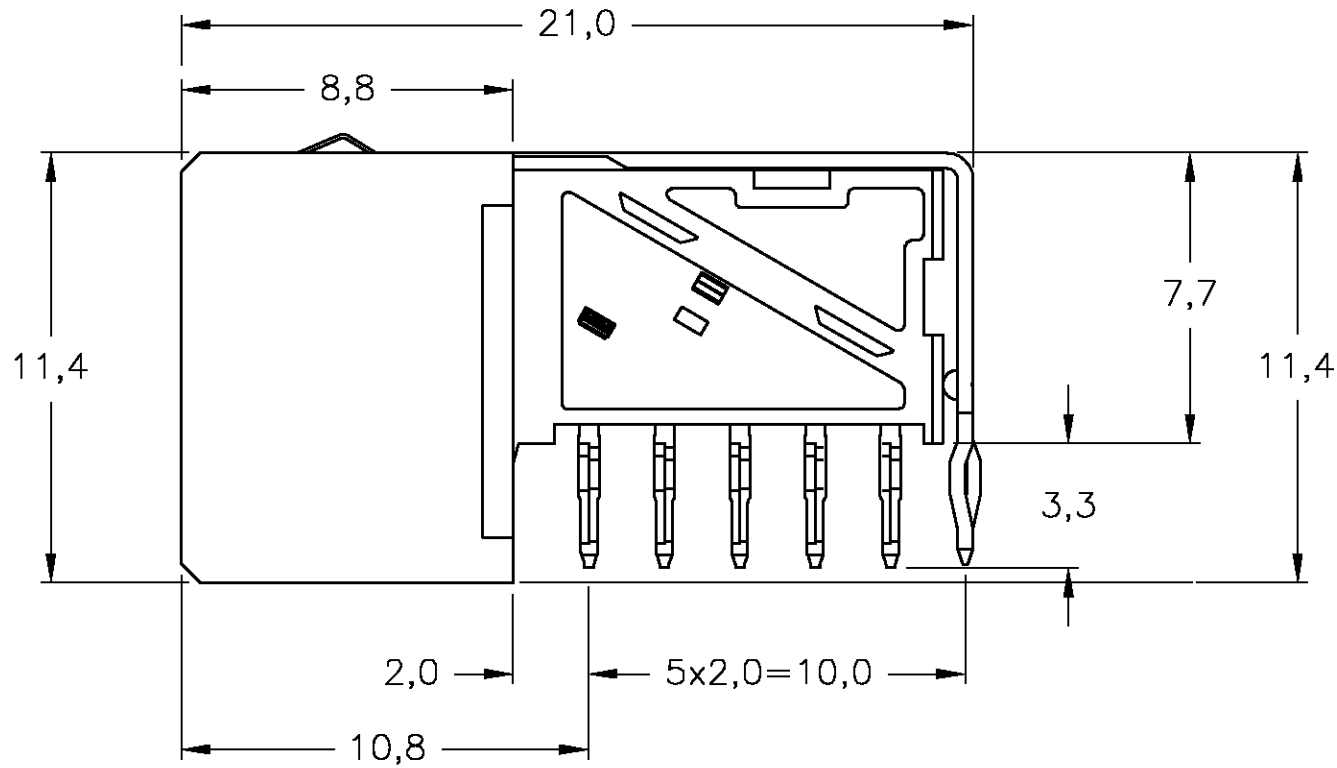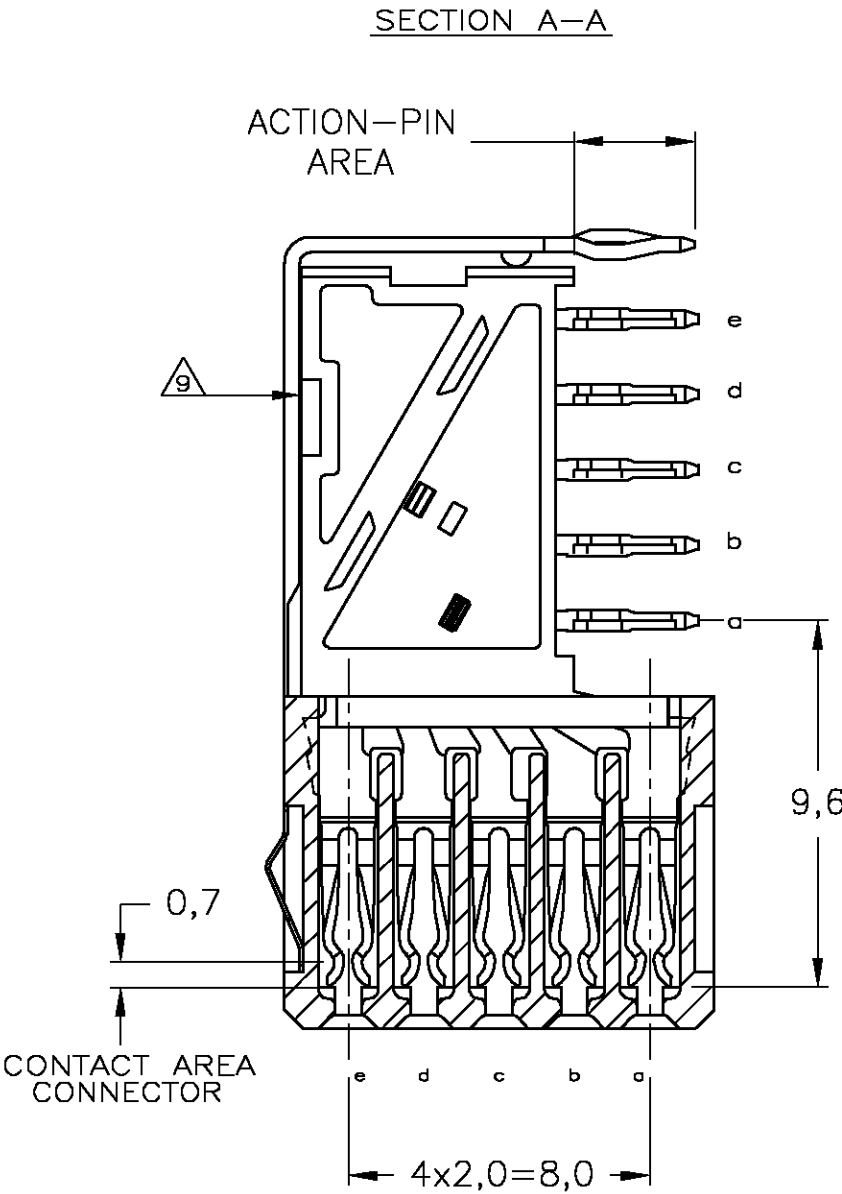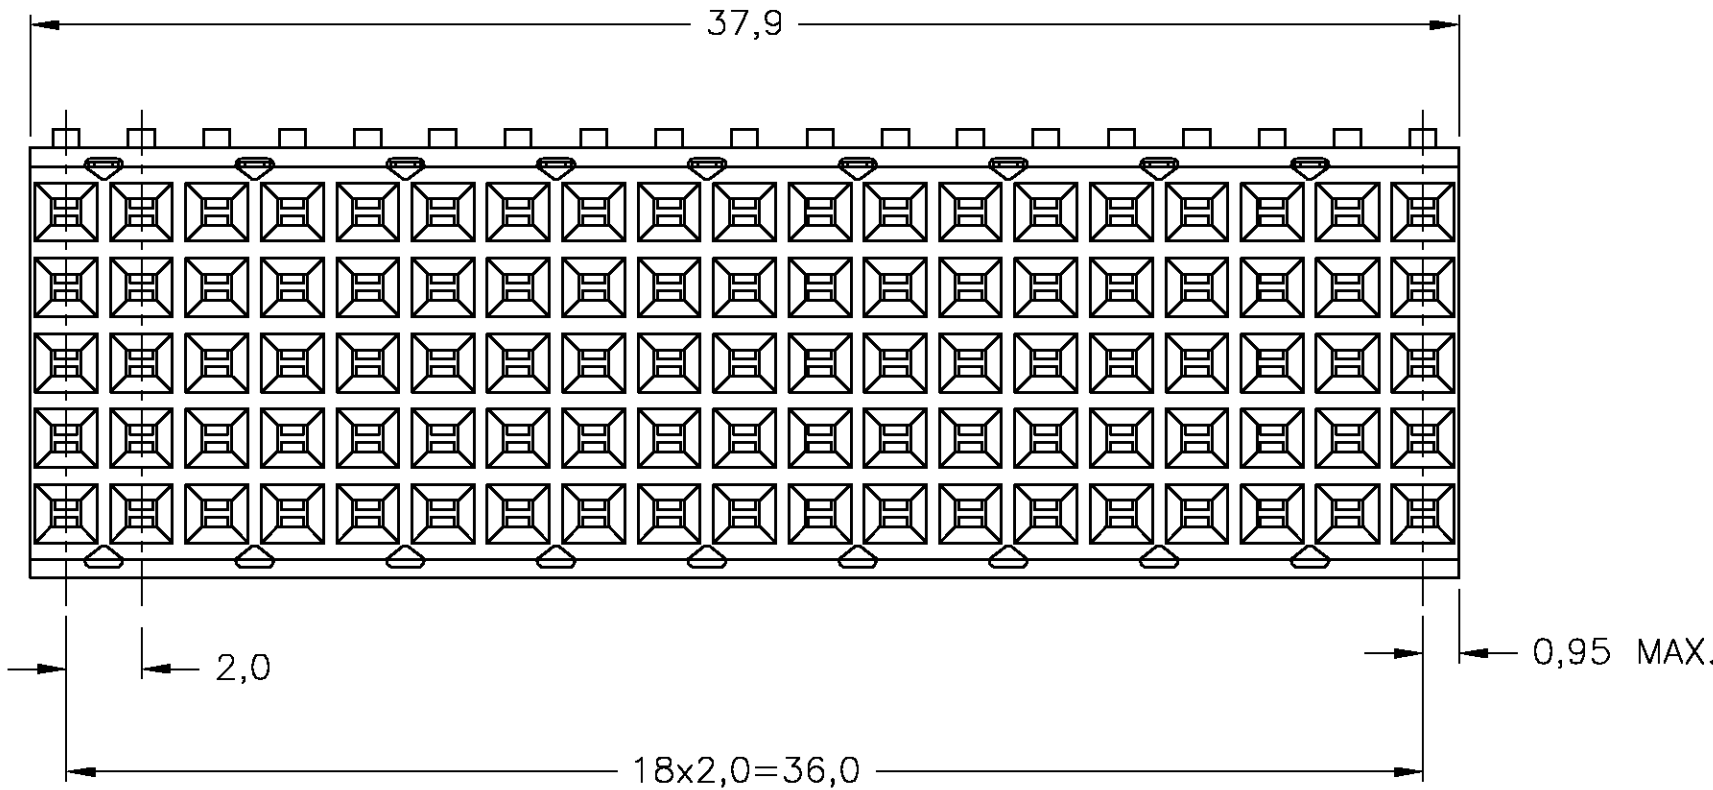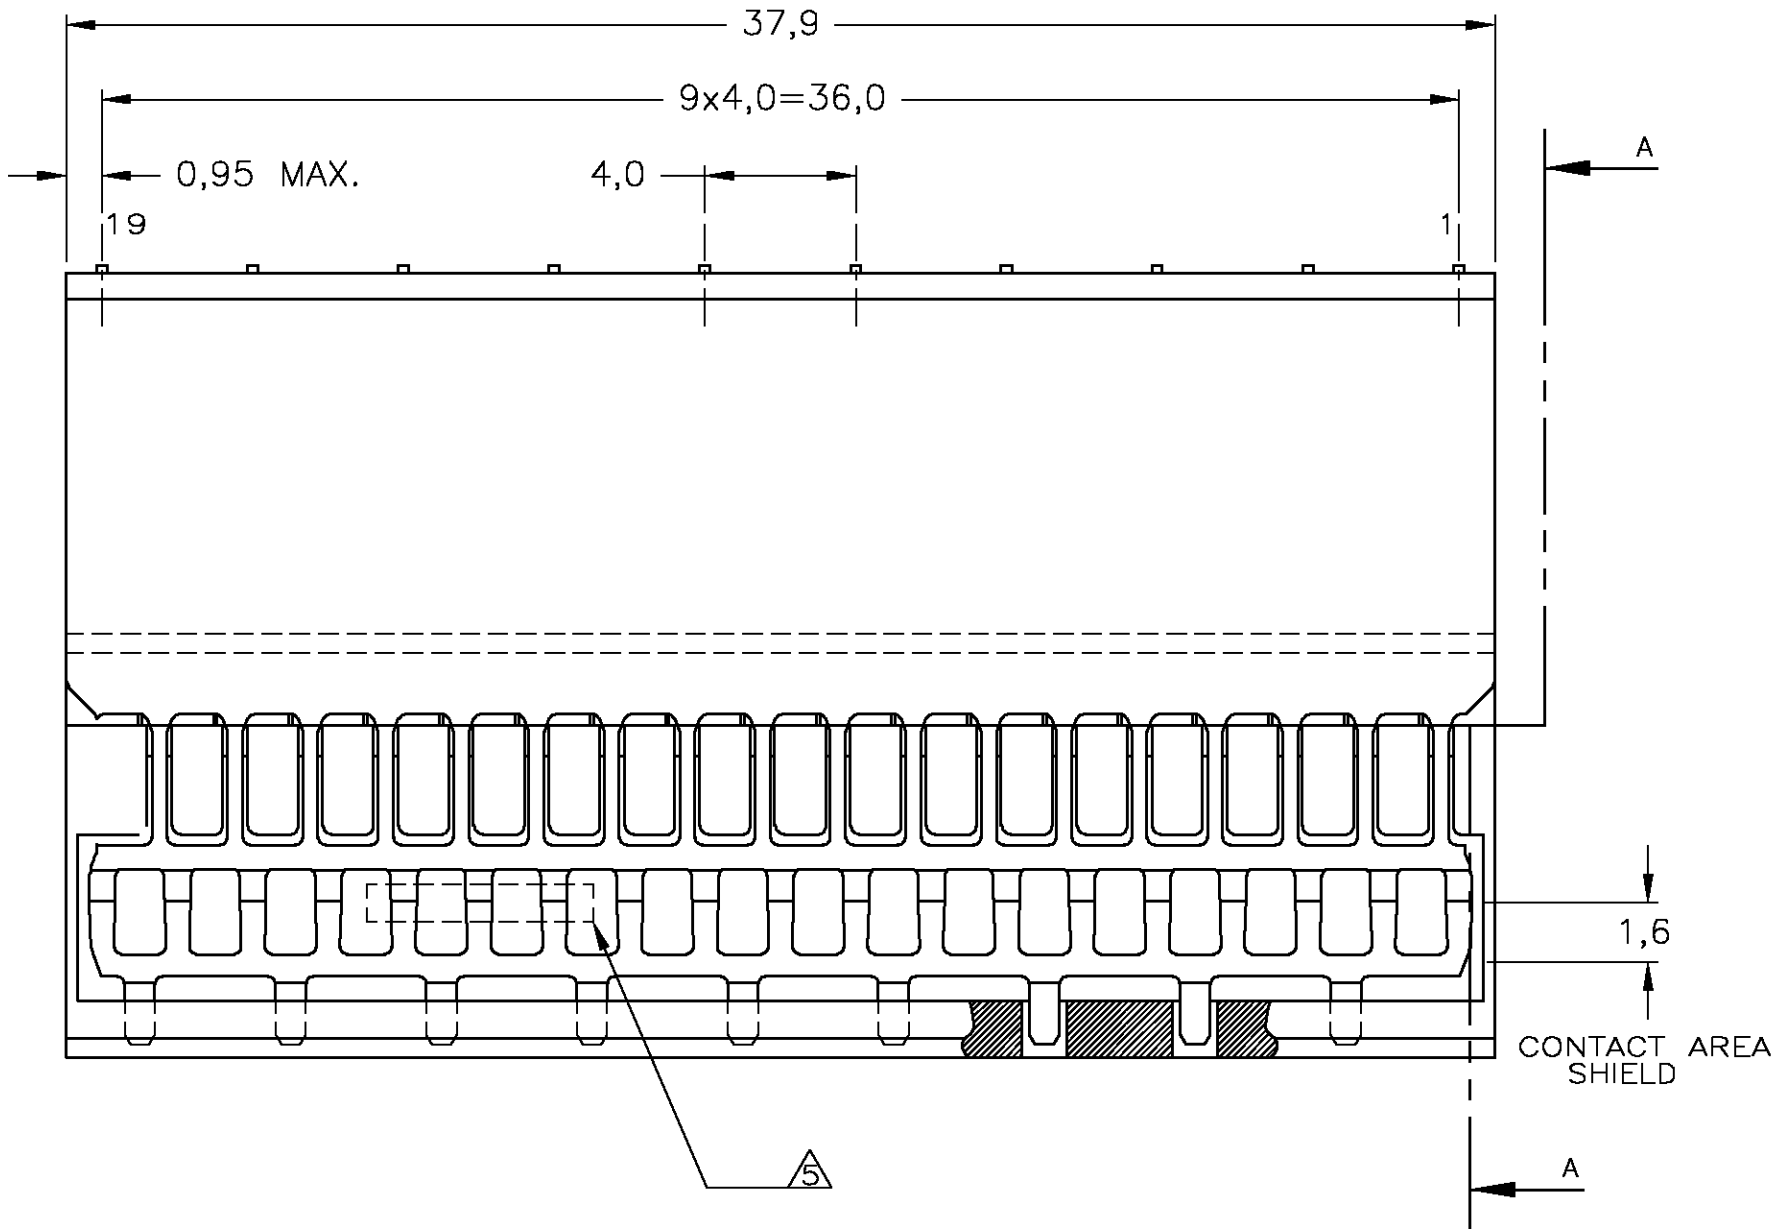

- NOTES:
- ⚠ PLATING CONNECTOR:
CONTACT AREA: 0,76μm Au MIN. OVER 1,27μm Ni MIN.
ACTION PIN : 0,5μm Sn MIN. OVER 1,27 μm Ni MIN.
 - ⚠ PLATING CONNECTOR:
CONTACT AREA: 1,27μm Au MIN. OVER 1,27 μm Ni MIN.
ACTION PIN : 0,5μm Sn MIN. OVER 1,27 μm Ni MIN.
 - ⚠ PLATING SHIELD:
CONTACT AREA: 0,76μm Au MIN.
ACTION PIN : 0,5μm Sn MIN.
REMAINDER : Ni
 - ⚠ MATERIAL CONTACTS; PHOSPHORBRONZE
MATERIAL HOUSING; GLASSFILLED POLYESTER (GRAY)
 - ⚠ ASSEMBLY PRINTED WITH P/N AND DATECODE
THE MARKING CAN APPEAR ON THE FRONT SIDE OR BACK SIDE.
 - ⚠ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-19 COLUMNS
95 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID
 - ⚠ ROW "f" 10 PLATED THROUGH HOLES FOR UPPERSHIELD
 - ⚠ CONNECTOR & SHIELD LUBRICATED WITH BELLCORE
APPROVED LUBRICANT, TECHNICAL REFERENCE
TR-NWT-001217 ISSUE 1, SEPT. 1992.
CONNECTOR TESTED AND QUALIFIED AGAINST BELLCORE
QUALITY LEVEL III, CENTRAL OFFICE APPLICATIONS
 - ⚠ SHIELD MOUNTED ON CONNECTOR WITH DOUBLE SIDED
ADHESIVE TAPE
 - 10 BASIC P.N. LOWERSHIELD: 5352029

COMPONENT SIDE AS SHOWN
RECOMMENDED PCB-HOLE LAY-OUT
SCALE 2,5:1

P.C.B. HOLE DIM. ACTION PIN
FOR DETAILS SEE
APPLICATION SPECIFICATION

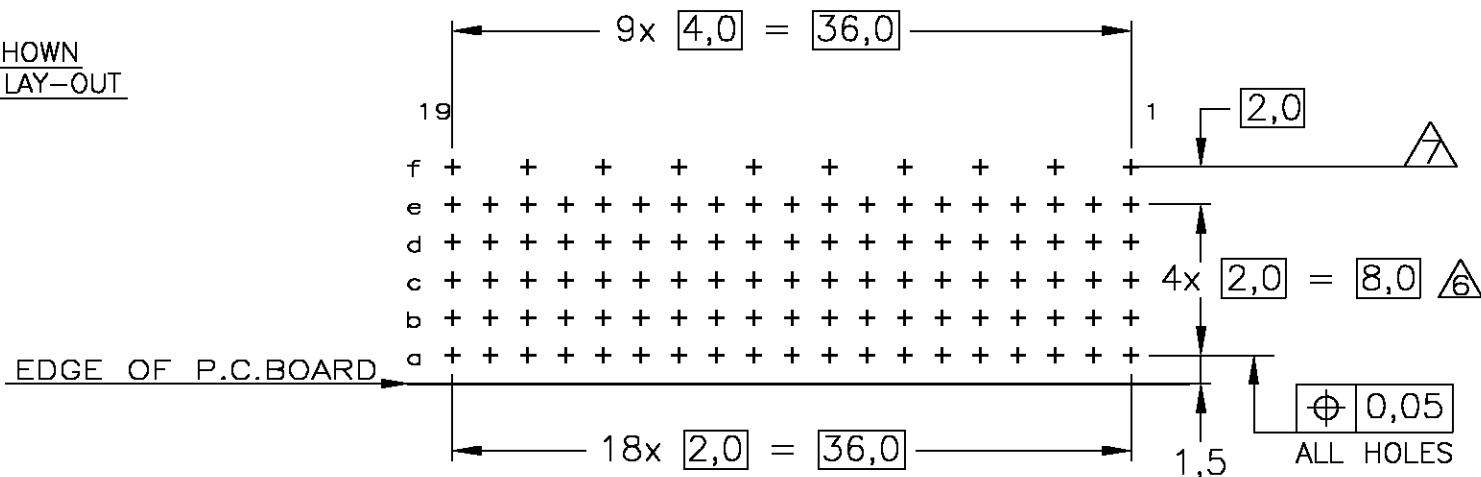

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	21AUG2004	tyco Electronics		Tyco Electronics Corporation	
		CHK	27OCT2004			's-Hertogenbosch,5222AR-32	
		APVD	27OCT2004				
		PRODUCT SPEC					
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		Z-PACK 2mm HM	
				APPLICATION SPEC		TYPE B - 19 COLUMNS	
				WEIGHT		PRE-SHIELDED RECEPTACLE	
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
				A2	00779	C=5352171	—
				CUSTOMER DRAWING		SCALE	SHEET
						5:1	1 OF 1
						REV	
						A	