

Distributed by:


JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 904421

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		A	REVISED PER EC 0S13-0257-04	11-17-04	LV	JG

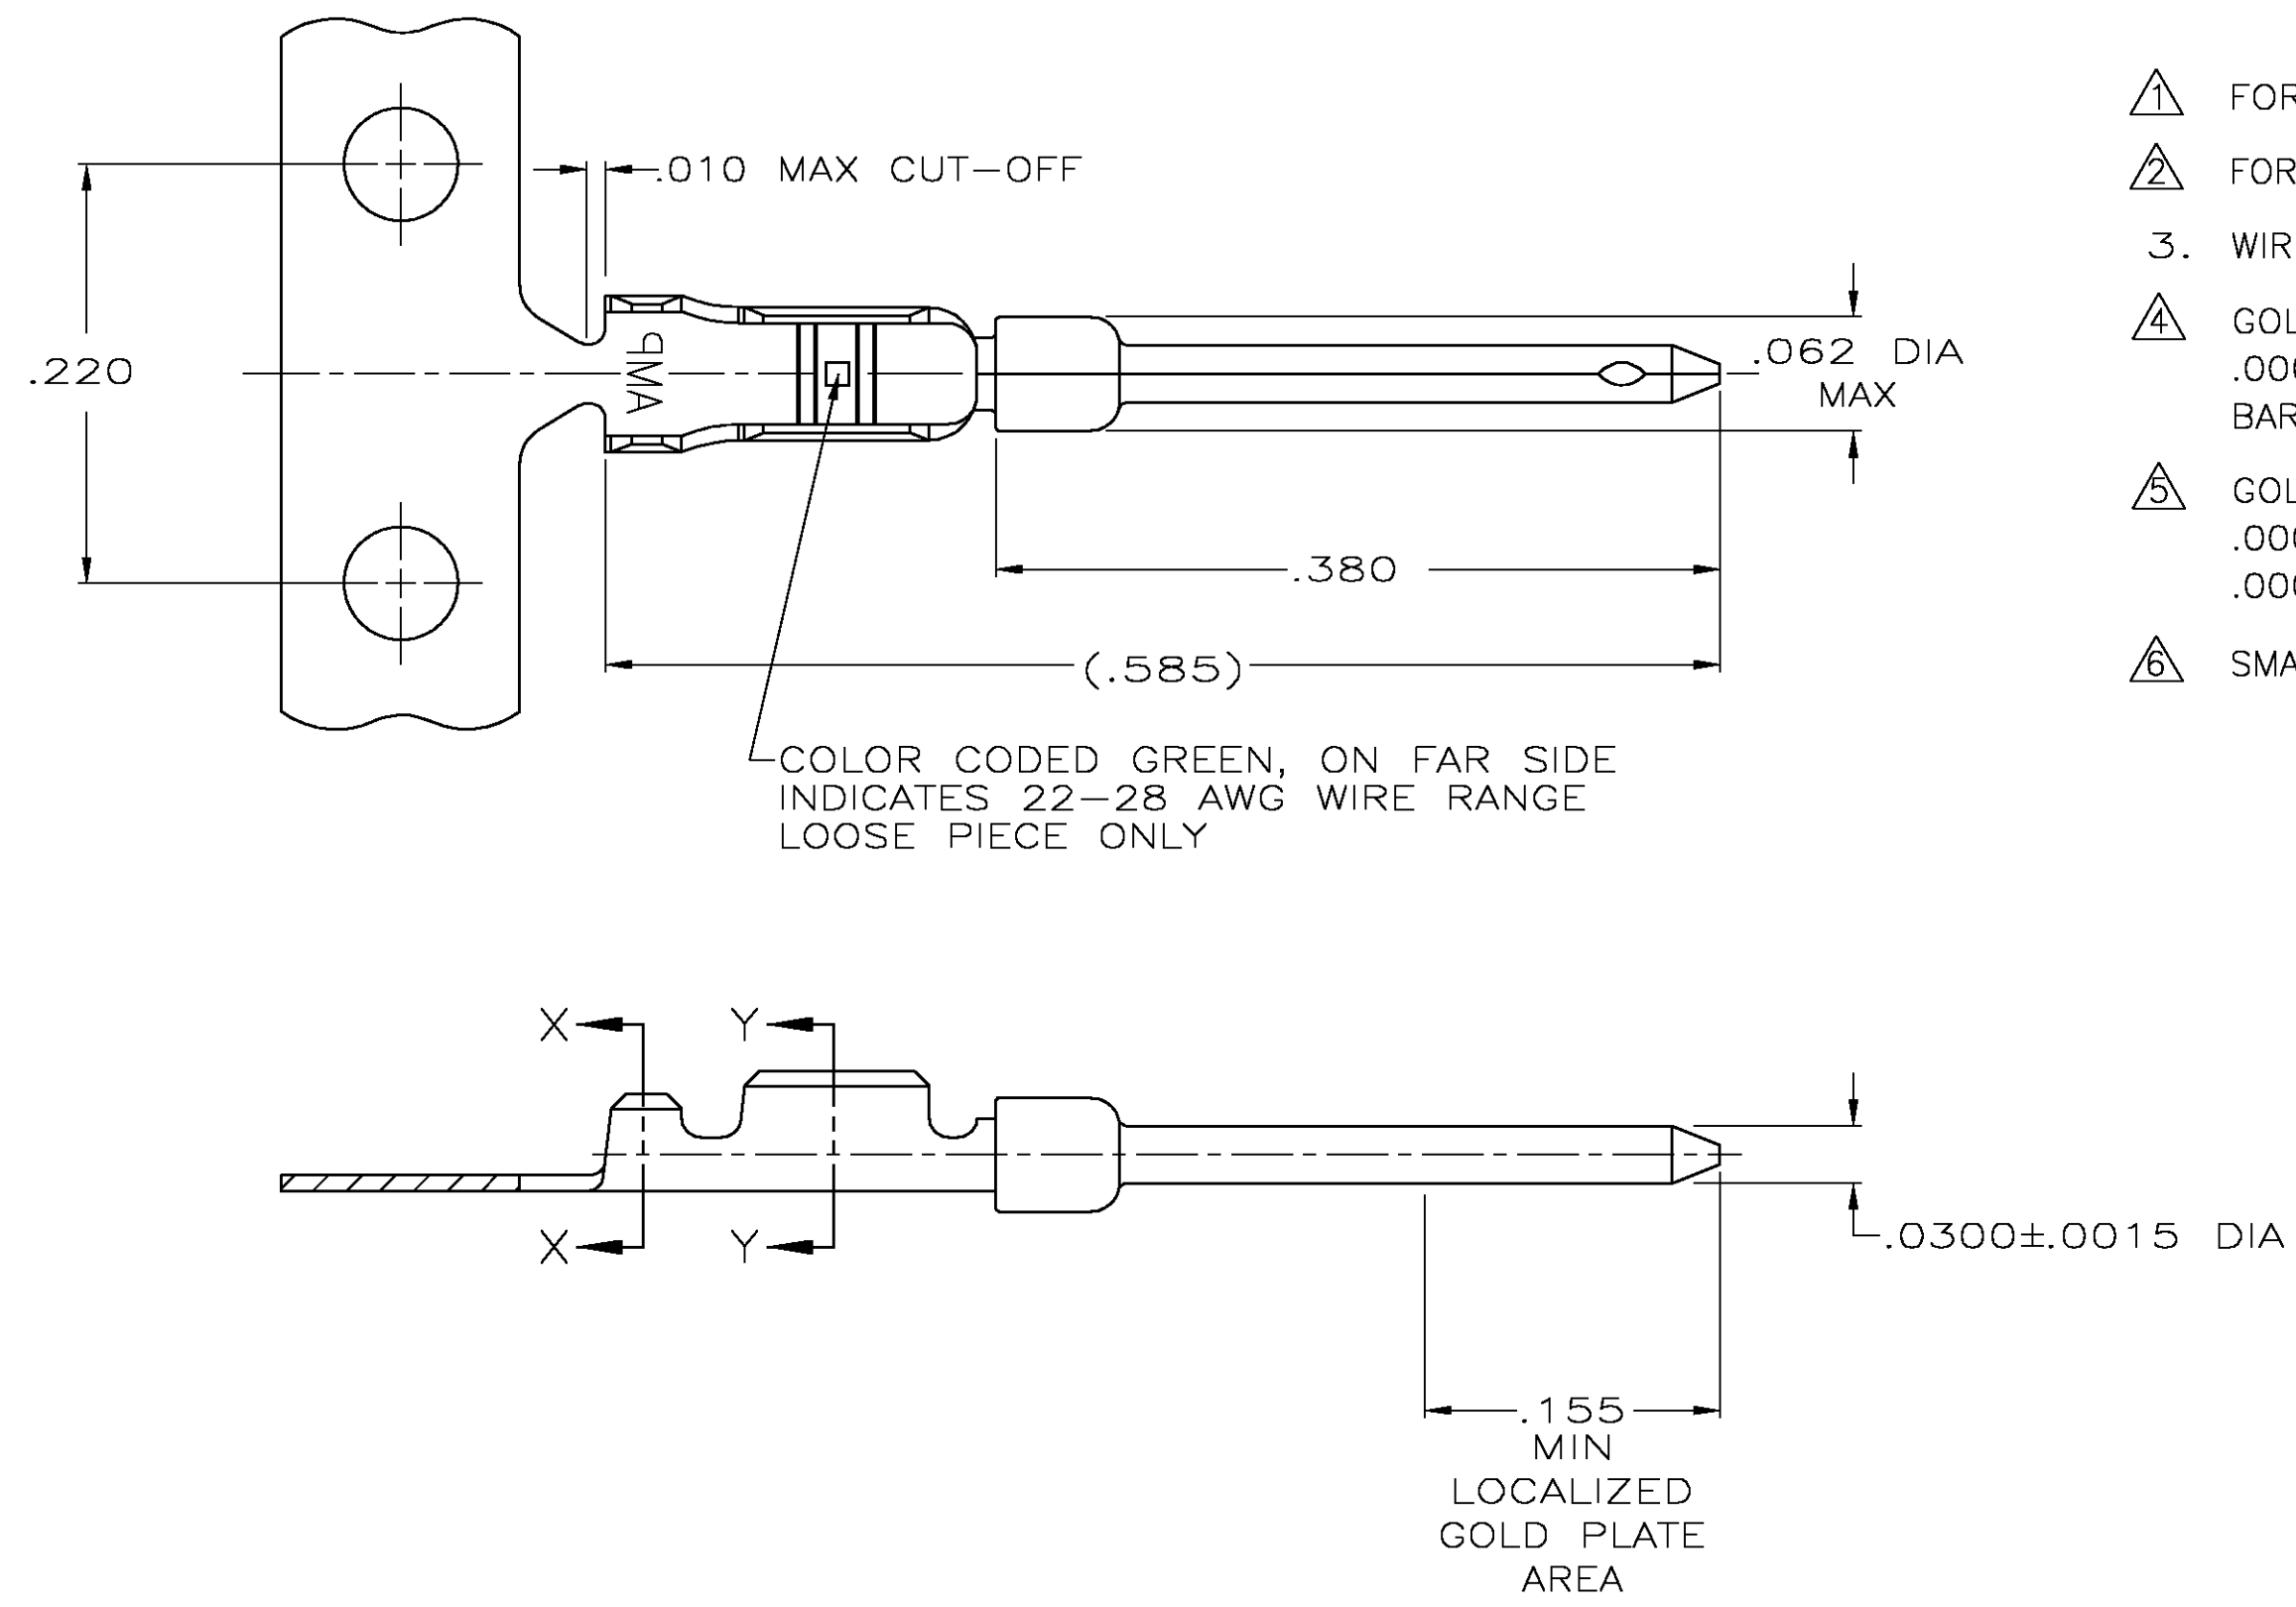

- △1 FOR MINI APPLICATOR.
- △2 FOR HAND TOOL USE ONLY.
- 3. WIRE RANGE OF 22-28, INSULATION RANGE OF .030-.040.
- △4 GOLD PLATED IN LOCALIZED GOLD PLATED AREA, 000030 MIN GOLD IN MATING AREA, .000100 MIN TIN IN WIRE & INSULATION BARRELS, BOTH OVER .000050 MIN NICKEL UNDERPLATE.
- △5 GOLD FLASH IN LOCALIZED GOLD PLATE AREA, .000100 MIN TIN IN WIRE & INSULATION BARRELS, BOTH OVER .000050 MIN NICKEL UNDERPLATE.
- △6 SMALL PACK PACKAGING.

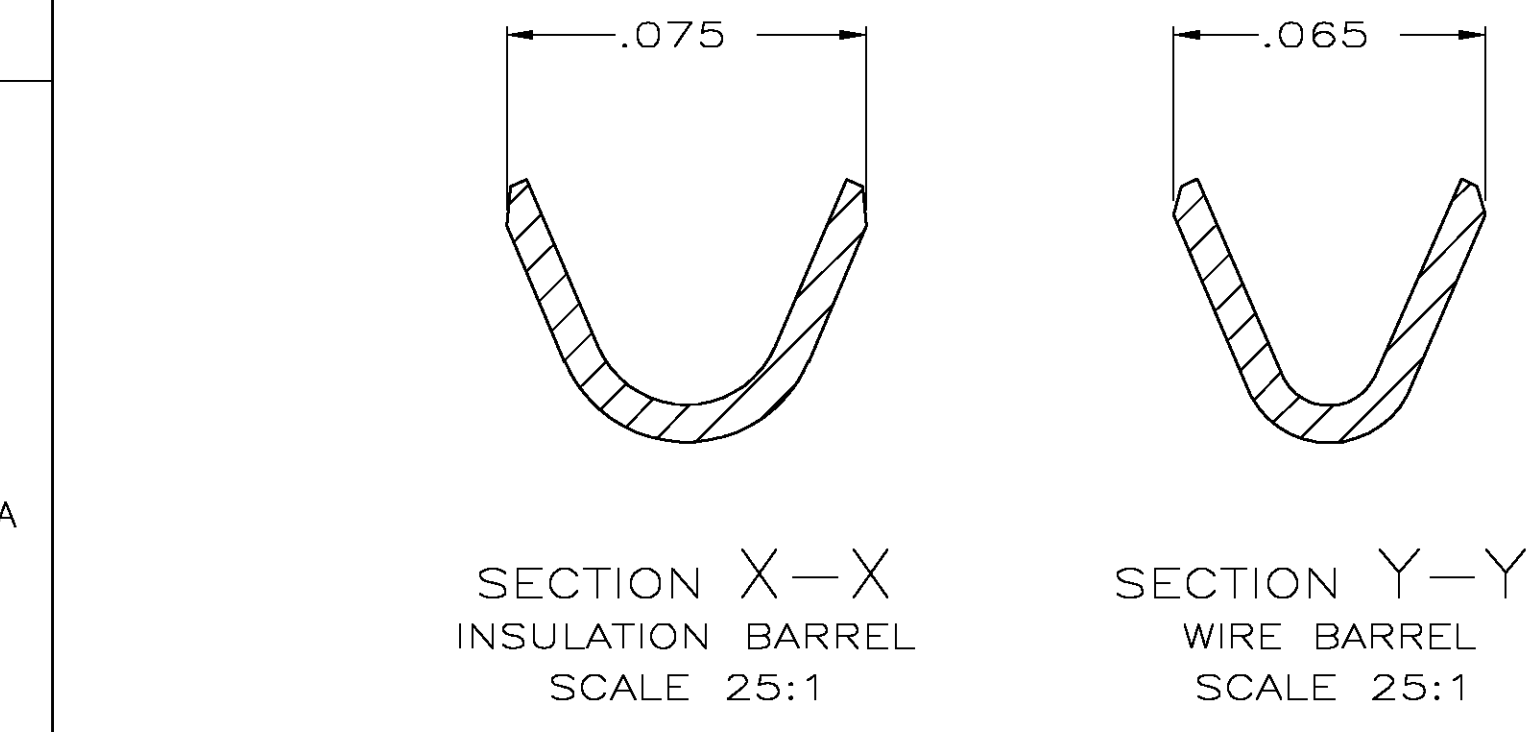

△4	△2	LOOSE PIECE	△6 1658670-5
△5	△2	LOOSE PIECE	1658670-4
△5	△1	STRIP	1658670-3
△4	△2	LOOSE PIECE	1658670-2
△4	△1	STRIP	1658670-1
FINISH	USE	TYPE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
INCHES

MATERIAL

BRASS

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC	±	-
1 PLC	±	-
2 PLC	±	-
3 PLC	±	.005
4 PLC	±	-
ANGLES	±	2°
FINISH	SEE TABLE	

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN

L. VARELA - DOCK5

11-17-04

CHK

J. GERACE

11-17-04

APVD

M. WALMSLEY

11-17-04

PRODUCT SPEC

108-1268

APPLICATION SPEC

114-10001

WEIGHT

-

CUSTOMER DRAWING

Tyco Electronics Corporation
Harrisburg, PA 17105-3608

NAME

PIN CONTACT, 22-28 AWG, 22 DF, AMPLIMITE

SIZE

A2

CAGE CODE

00779

DRAWING NO

C=1658670

RESTRICTED TO

-

SCALE

10:1

SHEET

1

OF

1

REV

A